



OD Series

Outdoor Billboard Sign Units

Application: This billboard unit provides high light levels with even distribution, for spot lighting. The unit is weather resistant and suitable for most outdoor applications.

Construction: Housing is made of heavy gauge extruded aluminum with die cast end plates and splice box fittings. Housing interior is finished in a baked enamel finish for maximum reflectivity and durability. Splice box is threaded for 3/4" conduit and contains adjusting screws for housing. Lens is clear smooth slide-on acrylic that resists yellowing.


Electrical: All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standards.

Mounting: Units are designed to be conduit mounted either individually, tandem, or in a continuous run.



Fixture Length		Length
T12HO	T8HO	
F48T12HO	---	53"
F72T12HO	---	77"
FT96T12HO	FT96T8HO	101"

For Tandem Units Multiply Unit above by 2

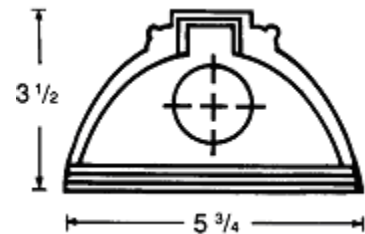

Maximum Weight = 11 lbs. / 53" 15 lbs. / 101"

Ordering Information

Specifications Subject To Change Without Notice

Model	# Lamps	Lamp Type	Ballast	Voltage
ODH-	2	48HO	M	
OD = No Ballast ODH = With Ballast	1 = One Single Tandem 21 = Single Tandem	T8 HO Lamps 96T8HO = F96T8HO T12 High Output 48HO = F48T12HO 72HO = F72T12HO 96HO = F96T12HO	M = Outdoor Weatherproof Magnetic	Blank = 120V

