



# CIT2-LED Series

## Vapor Tite Unit

**Application:** This fully weatherproof LED unit is designed for use in areas of wet location. Designed to withstand direct contact with rain this unit is corrosion resistant and waterproof. This unit is ideal in areas such as car washes, store fronts, parking garages, kitchens, and chemical plants. Vapor Tite unit is capable of being hosed down for easy cleaning.

**Constriction:** Exterior housing is designed for single piece injection molded fiberglass/plastic combination blend. Neoprene gasket and stainless steel pressure locks ensure waterproof seal. Interior gear tray is heavy gauge die formed steel which hinges to allow electrical raceway access while remaining attached to luminaire housing during installation and maintenance.

**Mounting:** Vapor Tite Unit available with an stainless steel external hanging bracket. VT Series is watertight and must be drilled and sealed for each surface mounting or chain hanging application.




Mounting Brackets Included

\*Different Lumen packages are available upon request

\*Please specify color  
3000k,4000k,5000k,6500k

\*Fixture can be set up with no ballast to take LED tubes (LED TUBE in part number)

Maximum Weight = 15 lbs. / 48" 32 lbs. / 96"

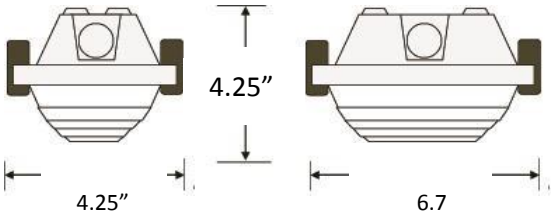

Ordering Information:

Type	LED	Size	SERIES	Color	Options
CIT2	LED-	2 (2FT) 4 (4FT) 8 (8FT)	950 1100 LED TUBE	3K 4K 5K 65K	EMB= Emergency REF= Specular Aluminum Reflector 95%

Number of strips	Size	series	Total Lumens	Total Wattage
2 (22" strips)	1x2	950	3600	16.6
2 (22" strips)	1x2	1100	4400	20.5
4 (22" strips)	1x4	950	7200	33.2
4 (22" strips)	1x4	1100	8800	41.0
8 (22" strips)	1x8	950	14400	66.4
8 (22" strips)	1x8	1100	17600	82.0
2 (2 FT LED TUBES)	1X2	LED TUBE	1620	18W
2 (4 FT LED TUBES)	1X4	LED TUBE	3600 or 4400	36W OR 44W
2 (4 FT LED TUBES)	1X8	LED TUBE	7200 or 8800	72W OR 88W