EL3-LED SERIES

Application: *For recessed commercial applications such as offices, hospitals, schools etc. Suitable for use in standard 15/16" inverted T-Bar grid ceilings.*

.

Construction: *Housing is die formed from heavy gauge steel and is finished in a baked white enamel or polyester powder coating for maximum reflectivity and durability. Hinged door with mitered corners comes with slide latches which allow for easy maintenance.*

Mounting: *All units are equipped with 7/8" knockouts in top, sides and end plates. Designed for use in inverted T Bar ceilings this fixture comes with earthquake clips built into end plate.*

Features: *High light transmission with pixelation hiding properties. Modern look. Linear arrayed LED modules provide diffuse, but effective illumination*

Led Light Source and luminaire Specs

Output Wattage*	29.10	47.73	28.63
Delivered Lumens (lms)*	2558.3	4646.7	2567.4
Efficacy (LpW)*	87.9	97.4	89.7
Color Rendering Index (CRI)*	83.7	83.8	83.9
Color Temperature (CCT) k	3636	3604	3650
Minimum Ambient Temp (°F)	-4F	-4F	-4F
Maximum Ambient Temp (°F)	140F	140F	140F
Dimming	0-10V	0-10V	0-10V
THD	<20	<20	<20
Rated Life (L70)	50,000 hrs	50,000 hrs	50,000 hrs
Warranty	5 Years	5 Years	5 Years
Voltage (V)	120-277V	120-277V	120-277V
Operating Frequency (Hz)	50/60	50/60	50/60
UL	Yes	Yes	Yes
FCC	Compliant	Compliant	Compliant

2X2 & 2X4

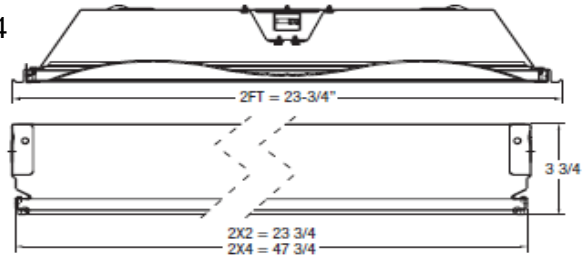

1X4

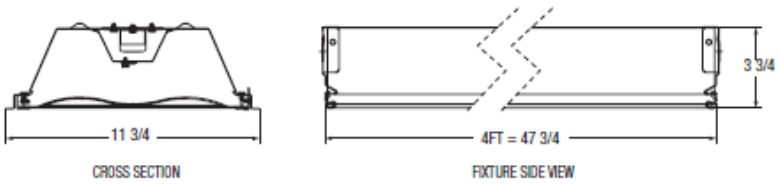

Model	Length	LED	COLOR
EL3	14 = 1X4 22 = 2X2 24 = 2X4	LED	35 40 50

LISTED

K-B Lighting Mfg. Co., Inc
2515 Metropolitan Drive Trevose Pa 19053
P: (215)953-6663 F: (215)953-6710 E: benkblight@gmail.com
KBLIGHTING.COM