WPM -WPL Series

Medium and Large Wall Pack

Application:

Warehouses
Tunnels
Loading Docks
Parking Garages
Apartment Buildings
Shopping Centers
Factory Entrances
Hospitals

Construction: Two Piece, die cast aluminum housing. Front and back secured together by two hinges and two screws. ½" tapped holes are supplied for securing connections and photocell. The Diffuser is .083 thick glass or injection molded high impact polycarbonate with interior and exterior prismatic surfaces which allows for minimum glare and maximum light distribution. Diffuser secured to housing by steel clips with continuous line of silicon gasket. The reflector is .063" thick aluminum. Secures to housing by means of screws.

Electrical: UL Listed for wet and damp Locations

Mounting: Wall mount for indoor and outdoor use.

Fixture	A	B	C
WPM	7 1/4"	14 1/4"	9"
WPL	9 3/8"	18 1/8"	9"
WPLD	13"	18 1/8"	9"

Fixture Size

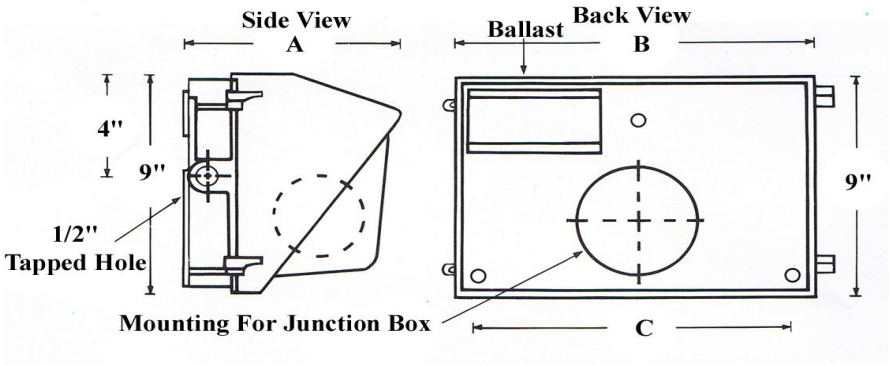

Ordering Information

Specifications Subject To Change Without Notice

Model	Lamps	Lamp Type		Voltage	Options
WPM	**1**	**35-HPS**			
WPM = Up To 150W HPS Up To 175W MH **WPL** = Up To 250W HPS Up To 250W MH **WPLD** = Up To 1000W HPS Up To 1000W MH	**1** = One	**High Pressure Sodium** **35-HPS** = 35W **50-HPS** = 50W **70-HPS** = 70W **100-HPS** = 100W **150-HPS** = 150 W **200-HPS** = 200W **250-HPS** = 250W **400-HPS** = 400W **1000-HPS** = 1000W	**Metal Halide** **100MH** = 100W **175MH** = 175W **250MH** = 250 W **400 MH** = 400W **1000MH** = 1000W	**Blank** = 120/277V	**CELL** = Photocell **480V** = 480 Volt Ballast **WG** = Stainless Steel Wire Guard

K-B Lighting Mfg. Co., Inc
2515 Metropolitan Drive Trevose Pa 19053
P: (215)953-6663 F: (215)953-6710 E: benkblight@gmail.com
KBLIGHTING.COM