




# HBL-314-LED SERIES

**Application:** A low-profile, narrow LED wraparound. high bay. All parts snap together for easy installation and maintenance. Housing accepts lift-and-shift lenses and frames. New low profile driver cover minimizes center shadows. Advanced microprism clear acrylic lens design provides excellent LED light output. Linear sides provide excellent light distribution and put more light in task areas. Manufactured from durable DR/Acrylic polymer blend. For most industrial or retail applications where low or high bay units are required, installations could include, warehouses, distribution centers, manufacturing facilities, retail stores etc.

**Construction:** Housing is designed from heavy gauge die formed steel and is finished in baked white enamel or polyester powder coating for maximum durability and reflectivity. Clear acrylic prismatic wrap around diffuser hinges from either side and snaps on and off for easy maintenance.

**Mounting:** Unit maybe surface, stem or aircraft cable mounted individually or in continuous rows

**Features and Benefits :** Side flanges reinforce for maximum rigidity Smooth hemmed sides for safe handling, Dimmable Driver

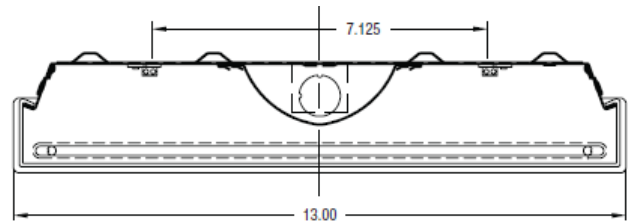

Input Wattage*	148.35
Delivered Lumens (lms)*	15156.0
Efficacy (LpW)*	102.2
Color Rendering Index (CRI)*	84.1
Color Temperature (CCT) k	3643
Minimum Ambient Temp (°F)	-4F
Maximum Ambient Temp (°F)	140F
Dimming	0-10V
THD	<20
Rated Life (L70)	50,000 hrs
Warranty	5 Years
Voltage (V)	120-277V
Operating Frequency (Hz)	50/60
UL	Yes
FCC	Compliant

Rows	Boards	Lumens
6 Rows	12	19,000

**Ordering Guide :**

Model	LED	COLOR	LENS
HBL-314	LED	35 40 50	L=LUMIEO LED C=PRISMATIC



**Electrical Information: (5 Year Warranty) Specifications Subject To Change Without Notice**

**K-B Lighting Mfg. Co., Inc**  
**2515 Metropolitan Drive Trevose Pa 19053**  
**P: (215)953-6663 F: (215)953-6710 E: benkblight@gmail.com**  
**KBLIGHTING.COM**