

Covered Wall Unit

Project:	
Type:	
Catalog #:	

STANDARD



This covered wall unit is designed to provide maximum lumen output in areas such as hallways, bathrooms, kitchens, stairways, and hospitals. An assortment of options in either single or double lamp allows this utility wall and surface mounted unit to satisfy a variety of lighting needs.

Construction:

- Housing is designed from heavy gauge die formed steel and finished in either baked white enamel or polyester powder coating. Socket plate is riveted to housing adding to the structural support of the fixture. Lens is extruded white acrylic. End plates are attached by acorn nuts and secure the lens to the fixture.

Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location M 59006648

Mounting

Unit is equipped with holes and 7/8" knockouts in housing for surface mounting. Fixture may be mounted individually or with optional joiner bands may be used in a continuous run.




FLUORESCENT WALL BRACKET FIXTURES

WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location M 59006648

DIMENSIONS

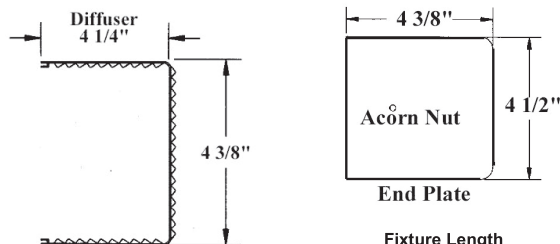

Fixture Length			
T12	T12HO	T8	Length
F15T12	---	---	18"
F20T12	---	F17T8	24"
F30T12	---	F25T8	36"
F40T12	F48T12HO	F32T8	48"

Ordering Guide

Max weight = 12lbs / 48"

Series	# of Lamps	Lamp Size	Ballast Type	Options	
555	1 = 1 lamp 2 = 2 lamp	T8 17 = F17T8 25 = F25T8 32 = F32T8 T12 15 = F15T12 20 = F20T12" 30 = F30T12 40 = F40T12	T5 14 = F14T5 21 = 21T5 28 = F28T5 T5HO 24 = F24T5 39 = F39T5 54 = F54T5"	120 = 120V MV = Multivolt E-LW = Electronic .77 BF E-O = Electronic 1.18 BF E-DIM = Dimming Unit SET LED N = Wired 1 end hot for LED tubes SET LED N/S = Wired 2 ends hot for LED tubes W/LEDIF = LED ballast driven tubes	EMB= emergency ballast 2BAL = 2 ballast REFS = Silver Reflector OCC-E = External Occupancy Sensor OCC-I= Internal Occupancy sensor BI-LEV= Bi-level dimming system O = grounded outlet TOG = Toggle Switch PULL= Pull chain switch NL= Night Light 3WAY= 3 way system PRIS = Prismatic lens DL= Down light only POLY= Polycarb lens

Specifications Subject To Change Without Notice