

Mini LED Panel Lights

Project:	
Type:	
Catalog #:	




- IC Rated
- 1/2" Thin Panel - Fits in Tight Ceiling Space ● Dimming Range 5%-100%
- Simple & easy installation
- Choice of CCT: 3000k, 4000k, 5000k
- Available in 3", 4", 6" Square & Round, 2" & 3" Gimbal
- 50,000hr Extra-Long Life
- Damp locations

MODEL	FLOOD	AVERAGE LIFETIME	TRIM COLOR	WARRANTY	CRI	INPUT VOLTS	DIMMABLE	BOX SIZE
ALL	40°	50000hrs (45.7yrs)	White	3 Year	80	120	Yes	2.32" (59mm) x 3.22" (82mm) x 1.50" (38mm)


3" Gimbal 2" Gimbal

MODEL	DESCRIPTION	WATT	LUMENS	COLOR	TEMPERATURE	LUMEN EFFICACY	POWER FACTOR	CUTOUT
LR23237	LED5W/DL2/GB/30K/FL	5	400	3000K	SOFT WHITE	80.0	>0.90	2.5" (50mm)
LR23238	LED5W/DL2/GB/40K/FL	5	400	4000K	COOL WHITE	80.0	>0.90	2.5" (50mm)
LR23239	LED5W/DL2/GB/50K/FL	5	400	5000K	BRIGHT WHITE	80.0	>0.90	2.5" (50mm)
LR23240	LED8W/DL3/GB/30K/FL	8	600	3000K	SOFT WHITE	75.0	>0.98	2.75" (70mm)
LR23245	LED8W/DL3/GB/50K/SQ	8	600	5000K	BRIGHT WHITE	75.0	>0.98	2.75" (70mm)
LR23247	LED8W/DL3/GB/30K/SQ	8	600	3000K	SOFT WHITE	75.0	>0.90	2.75" (70mm)
LR23249	LED8W/DL3/GB/50K/SQ	8	600	5000K	BRIGHT WHITE	75.0	>0.90	2.75" (70mm)


3" ROUND DIMENSIONS

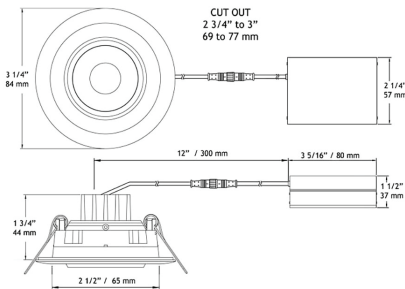

3" SQUARE DIMENSIONS

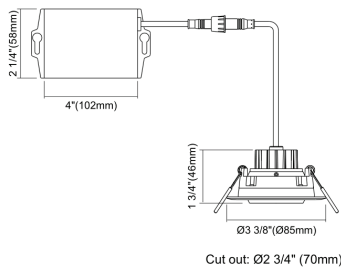

2" DIMENSIONS

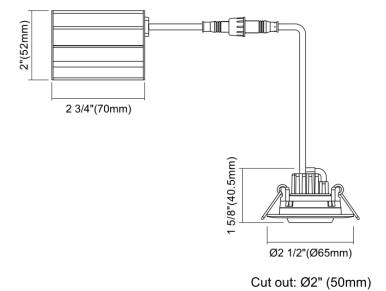

Specifications Subject To Change Without Notice