

Project:	
Type:	
Catalog #:	

### STANDARD



This billboard unit provides high light levels with even distribution, for spot lighting. The unit is weather resistant and suitable for most outdoor applications.

### Construction:


- Housing is made of heavy gauge extruded aluminum with die cast end plates and splice box fittings. Housing interior is finished in a baked enamel finish for maximum reflectivity and durability. Splice box is threaded for 3/4" conduit and contains adjusting screws for housing. Lens is clear smooth slide-on acrylic that resists yellowing.

### Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp and wet location

### Mounting


Units are designed to be conduit mounted either individually, tandem, or in a continuous run

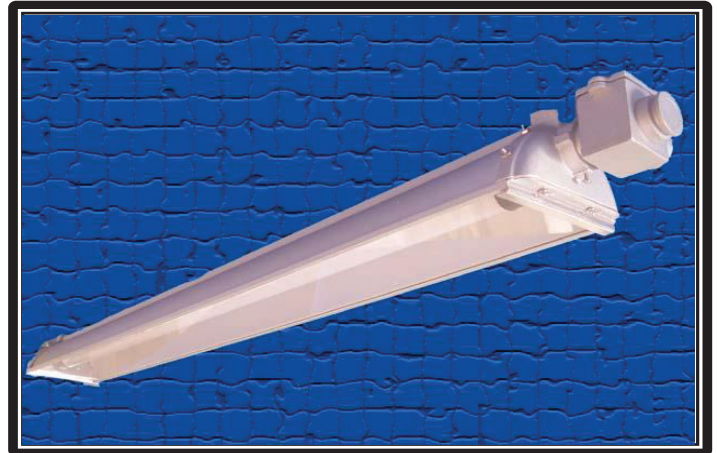

### WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location

### DIMENSIONS



### Fixture Length

# of Lamps	T5HO	Length
1 or 2	F54T5HO	53"
<b>TANDEM</b>		
Single or Double	F54T5HO	101"

For Tandem Units Multiply Unit above by 2

max weight= 11lbs/53" 15lbs/101"

### Ordering Guide

Series	Size	Lumens	Color	Options
OD-LED	4 = 4FT 6 = 6FT 8 = 8FT	<b>4FT</b> 3220 (17W) 4480 (24W) 5705 (30W) 6910 (37W) 8640 (48W) 11797 (70W)	<b>8FT</b> 3220 (17W) 4480 (24W) 5705 (30W) 6910 (37W) 8640 (48W) 11797 (70W) 13820 (74W) 17280 (96W) 23594 (140W)	3K 35K 4K 5K  EMB = emergency ballast FR = Frosted lens over LED Boards

\*Call Factory for lumen options of 6FT models

Specifications Subject To Change Without Notice