

Project:	
Type:	
Catalog #:	

APPLICATIONS


The linear 4x4 pendant or surface mounted fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x4 Series fixtures can be installed individually or in group patterns.

FEATURES & BENEFITS

- 2 or 4 lamp positions
- Fixtures can be surface mounted to the ceiling, recessed in ceiling or pendant hung by stem or cable
- Accepts various lenses or louvers
- 8' units have a steel mullion to join two individual diffusers
- Consult factory for other lengths
- Optional welded light-leak flanges are available on ends
- Every fixture is individually tested
- **UL** listed for damp location

SPECIFICATIONS

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Uplight fixtures have two rows of 1/2" x 4" apertures along the top of the housing to provide approximately 12% uplight for ceiling illumination.

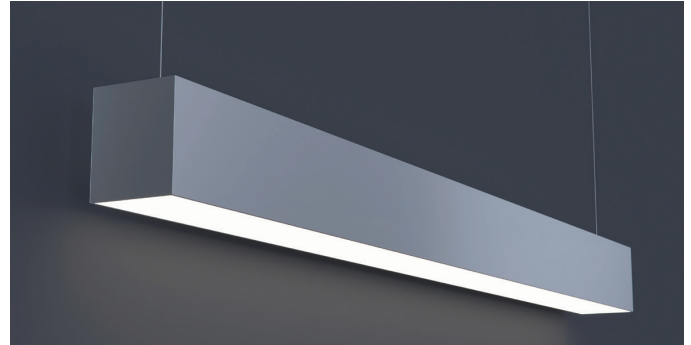

ORDERING DATA

EXAMPLE: SPR44RSW228MVWH

SPR44						
Series	Mounting	Direct/Indirect	# Lamps	Lamp Type	Ballast	Finish
SPR44	R Regular Recess Lay-in	Blank Recessed Surface or Wall Direct only	1	14 24" T5	MV 120-277VAC Multivolt	WH White
Reflector	RF Recessed with Flange*	I Indirect only	2	17 24" T8	DMV 0-10V Dimming 120-277VAC Multivolt	SL Silver
Blank Standard	RR Recessed for Dry Wall 1/2"	DI Direct w/Indirect Slots	21	21 36" T5		BK Black
WW Wall wash	S Surface/Pendant Direct only		24	24TAN 2-36" TAN T5	R120 Residential 120V Ballast	BZ Bronze
	W Wall Mount Direct only		24	24 24" T5HO		IN Iron
		SW Smooth White .100 thick lens (Standard)	Per cross section	24TAN 2-24" TAN T5HO	PMV Program Start Multivolt	
		S.5 Specualr parabolic louver (1/2"x1/2"x3/8")		25 36" T8		LED** Wired 1 end hot for T8 LED lamps
		SF Snap-in frosted lens		25TAN 2-36" TAN T8	LED2E** Wired 2 ends hot for T8 LED lamps	
		LV Baffled louver		28 46" T5		
		A Prismatic Acrylic #12 Pattern		28TAN 2-46" TAN T5		
				32 48" T8		
				32TAN 2-48" TAN T8		
				39 36" T5HO		
				54 46" T5HO		
				54TAN 2-46" TAN T5HO		

* RF for sheetrock installation

Notes:
Example: SDI Surface/Pendant Direct w/Indirect Slots
WI Wall Mount Indirect only

** Assembled with no ballast, made for UL Listed, self ballasted retrofit LED lamps. Lamps not included

Options

Plug In Options for Continuous Runs

- B1** T8/T5 1L500 lumen battery backup
- B2** T8/T5 1L/2L 700 lumen battery backup
- B3** T8/T5 1L/2L 1400 lumen battery backup
- B51** T5HO 1L 500 lumen battery backup
- B52** T5HO 1L 800 lumen battery backup
- B53** T5HO 1L 1300 lumen battery backup
- L841** Lamps installed 841K
- L835** Lamps installed 835K

- PI1** 3 wire harness, including white, black and green
- PI2** 4 wire harness, including white, black, green and blue for emergency battery backup
- PI3D** 5 wire harness, including white, black, green violet and grey for dimming

- HC301WH** Cable kit w/4' cable + power feed cable incl.w/white canopy
- HC302WH** Cable kit w/12' cable + power feed cable incl.w/white canopy

Specifications Subject To Change Without Notice

K-B Lighting Mfg. Co., Inc

2515 Metropolitan Drive Treose PA 19053

P: (215)953-6663 F: (215)953-6710 E: bkessel@kblighting.com

www.kblighting.com