

Undercabinet Unit

Project:	
Type:	
Catalog #:	

STANDARD



This undercabinet fixture is designed for use in areas with low clearance and where high light levels are desired. It is ideal for use in kitchens, hospitals, desk areas, and bathrooms.

Construction:

- Housing is designed from heavy gauge die formed steel and finished in a baked white enamel or polyester powder coating for maximum reflectivity and durability. Lens is extruded white acrylic that snaps on and off for easy relamping.

Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location M 59006648

Mounting

Every fixture is supplied with keyhole slots for easy surface mounting without entering ballast raceway. 1/2" knockouts provided in ends and bottom for supply connection.




WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location M 59006648




DIMENSIONS



Fixture Length

T8	Length
F17T8	24 1/16"
F25T8	36 1/16"
F32T8	48 1/16"

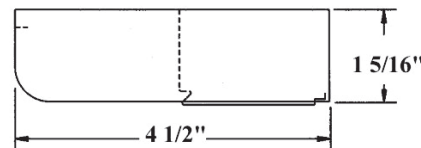

Ordering Guide

max weight= 6lbs/ 21"

Series	# of Lamps	Lamp Size	Ballast Type	Options
1X4 RDI	1 = 1 Lamp	T8 17= 24" 25 = 36" 32 = 48"	120 = 120V MV = Multivolt E-LW = Electronic .77 BF E-O = Electronic 1.18 BF E-DIM = Dimming Unit	O = Grounded Outlet TOG= Toggle Switch ROC = Rocker Switch PULL = Pull chain Switch CP-XE = Cord Exit End CP-XS = Cord Exit Side CP-XB = Cord Exit Base
			SET LED N = Wired 1 end hot for LED tubes SET LED N/S = Wired 2 ends hot for LED tubes W/LEDIF = LED ballast driven tubes	