



Project:	
Type:	
Catalog #:	

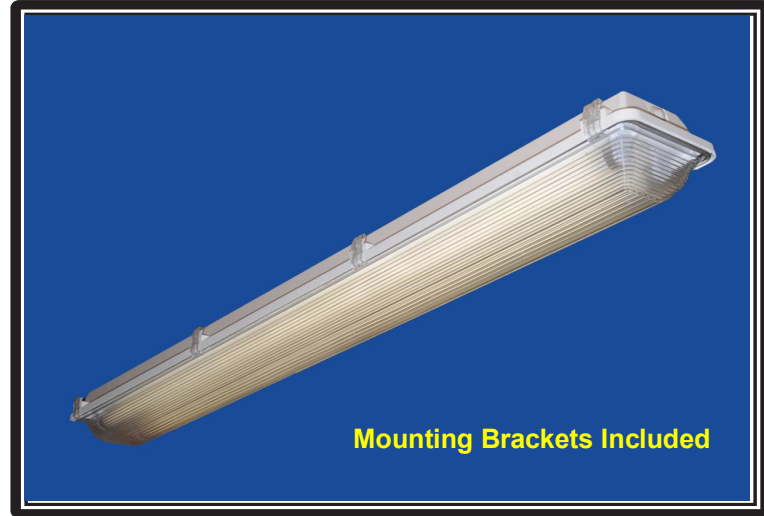

### STANDARD



This fully weatherproof T5 or T8 unit is designed for use in areas of wet location. Designed to withstand direct contact with rain this unit is corrosion resistant and waterproof. This unit is ideal in areas such as car washes, store fronts, parking garages, kitchens, and chemical plants. Vapor Tite unit is capable of being hosed down for easy cleanin

### Construction:

- Exterior housing is designed for single piece injection molded fiberglass/plastic combination blend. Neoprene gasket and stainless steel pressure locks ensure waterproof seal. Interior gear tray is heavy gauge die formed steel which hinges to allow electrical raceway access while remaining attached to luminaire housing during installation and maintenance.

### ELECTRICAL

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminare Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp and wet location

### Mounting


Vapor Tite Unit available with an stainless steel external hanging bracket. VT Series is watertight and must be drilled and sealed for each surface mounting or chain hanging application.

### WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp and wet location
- BAA Compliant




### DIMENSIONS

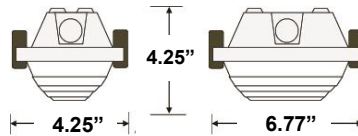

RF	20									
	80%				70%				50%	
RC	70	50	30	10	70	50	30	10	50	30
0	109	109	109	109	107	107	107	107	101	101
1	98	93	89	84	95	91	86	83	86	83
2	89	80	73	67	86	78	72	66	74	69
3	81	70	62	56	78	68	61	55	65	59
4	74	62	53	47	71	60	52	46	57	51
5	67	54	45	39	65	53	45	38	50	43
6	61	48	39	33	59	47	39	33	45	38
7	56	43	35	29	54	42	34	28	40	33
8	52	39	30	25	50	38	30	24	36	29
9	48	35	27	21	46	34	25	21	32	25
10	44	31	24	19	43	31	23	18	30	23

T8	T5	T5HO	Length
F17T8	F14T5	F24T5	28"
F32T8	F28T5	F54T5HO	52"
Tandem 4' Tubes			Length
FF32T8	F28T5	F54T5HO	100"
8 ft Tubes			
T8	T8HO	Length	
F96T8	F96T8HO	100"	



### Ordering Guide

Max weight = 15lbs / 48" 32lbs / 96"

#### CIT2-LED

#### Series

CIT2-LED

#### Size

2 = 2FT  
4 = 4FT  
8 = 8FT

#### Lumens

2FT  
3166 (17W)  
4350 (24W)  
5470 (31W)  
6452 (39W)

4FT  
3220 (17W)  
4480 (24W)  
5705 (30W)  
6910 (37W)  
8640 (48W)  
11797 (70W)

#### Color

3K  
35K  
4K  
5K

#### Options

EMBA = External Metal Reflector  
REFS = Silver Reflector  
OCC-E = External Occupancy  
Sensor OCC-I = Internal Occupancy  
Sensor BILEVEL = Bi-level system  
SS = Stainless Steel Latch  
POLY = Polycarb lens  
FR = Frosted lens over LED boards

\*\$!%\$j ~ck j c HJ YX]a a ]b[ ' gHbXUFX'dYf 'Zl hi fY'

\*< ] [ \ Yf UbX'W gfrca ""i a Yb' dUW Uf Yg Uj Uj UV'Yi dcb f'Yei Ygh''



# Certifications

Patented

**UL**

**NSF**

**NEMA4X**

**IP65**

**IP66**

**IP67**

**RoHS**

**PSI 1500**

**SLP Guardian Seal**



**UL Listing: File E363909**  
**UL Recognized Components: File E215168**  
**Components Tested and Certified**  
**by NSF International**

**NEMA 4X**



Offers 34% more contact between the lens and the gasket. Guardian Seal™ is a unique combination of our Injection Molded lens features and high performance “poured in place” gasket. This provides the most advanced sealing system available.

