KB LIGHTING

320 Series
1" Deep Undercabinet Unit

Project	
Type	
Catalog #	

STANDARD

The shallowest of all fixtures, this unique 1" deep unit is specially designed for T-5 tubes to be mounted under cabinet with flat, non recessed base. 320 series fixtures are ideal for use in kitchens, hospitals, desk areas, and bathrooms.

Construction:

- *Housing is designed from heavy gauge die formed steel and finished in a baked white enamel or polyester powder coating for maximum reflectivity and durability. Lens is extruded white acrylic that snaps on and off for easy relamping.*

Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location
M 59006648

Mounting

Every fixture is supplied with keyhole slots for easy surface mounting without entering ballast raceway. ½" knockouts provided in ends and bottom for supply connection.

WARRANTY & LISTINGS

- *5-year warranty of all electronics and housing.*
- *UL Certified for damp location M 59006648*

Buy American Act COMPLIANT

DIMENSIONS

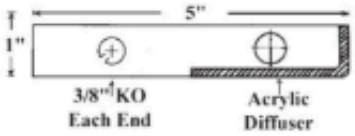



Fixture Length

T5	Length
F8T5	12"
F13T5	21"
F14T5	23"
F21T5	35"
F28T5	47"

Ordering Guide

max weight= 6lbs/ 21"

320

Series	# of Lamps	Lamp Size	Ballast Type	Options
320	1 = 1 Lamp	T5 **08** = F8T5 **13** = F13T5 **14T5** = F14T5 **21T5** = F21T5 **28T5** = F28T5	**120** = 120V **MV** = Multivolt **E-LW** = Electronic .77 BF **E-O** = Electronic 1.18 BF **E-DIM** = Dimming Unit **SET LED N** = Wired 1 end hot for LED tubes **SET LED N/S** = Wired 2 ends hot for LED tubes **W/LEDIF** = LED ballast driven tubes	**O** = Grounded Outlet **TOG**= Toggle Switch **ROC** = Rocker Switch **PULL** = Pull chain Switch **CP-XE** = Cord Exit End **CP-XS** = Cord Exit Side **CP-XB** = Cord Exit Base