

Project	
Type	
Catalog #	

Overview

A high-end decoration of light, it has strong points of low power consumption, long life span, high brightness, free maintenance, easy installation and instruction, waterproof ect. LLS-M can project wall 3-5M high. This product suits for billboard, bridge, river, lake fence, building outline, ect.



Standard



SPECIFICATIONS

STRUCTURE

Size	Shell Material	LED	Protection Rating	Input Voltage	Operating Temperature
39.4"x1.4"x2.2"	Aluminum Alloy	SMD/5050	IP65	24V DC	-20~45°C

MODEL CONFIGURATION TABLE

Model No.	LED Quantity	LED Color	Power Consumption	Beam Angle	Size	Weight
Oona Slim Wall Washer 24P	24/2835	R,G,B,W,WW	10 Watt	25x35°	20.5" x 1.4" x 2.2"	0.95±5%kgs
Oona Slim Wall Washer 48P	48/2835		20 Watt		39.4" x 1.4" x 2.2"	1.9±5%kgs
Oona Slim Wall Washer 30P RGB	30/5050	RGB	7 Watt	20°/30°x40°	20.5" x 1.4" x 2.2"	0.95±5%kgs
Oona Slim Wall Washer 60P DMX	60/5050	RGB/RGBW	13 Watt		39.4" x 1.4" x 2.2"	1.9±5%kgs

WORKING MODE

Steady Color Mode: Directly connected to the power supply work


DMX MODE: International standard DMX512 signal

DMX Addressing: This product has 12/24 DMX Channels, use "Talent II" for addressing, for details please refer to its instruction.

***Valid DMX address: 001-512

***Enter or quit DMX mode automatically once detecting valid signal!!!





DIMENSIONS

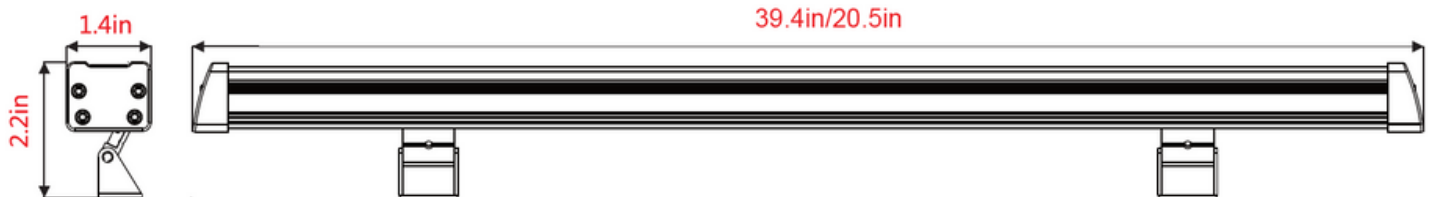

PHOTOMETRICS PARAMETERS





DISTRIBUTION CURVE

G2G Oona Slim Wall Washer

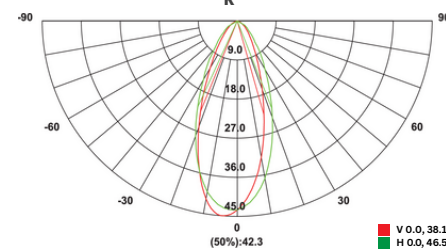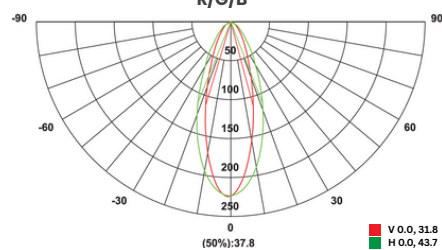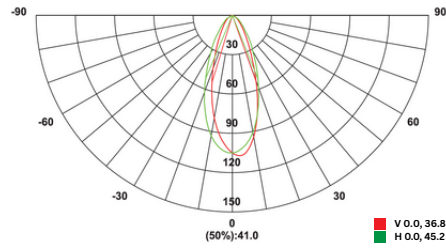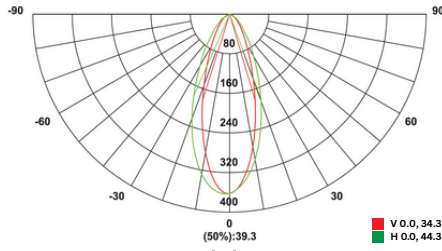


ILLUMINANCE AT A DISTANCE

Oona Slim Wall Washer

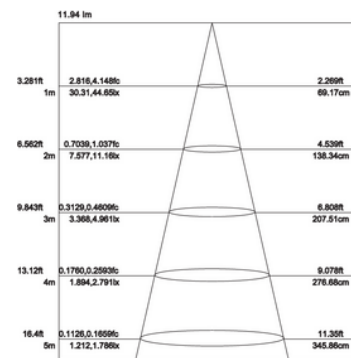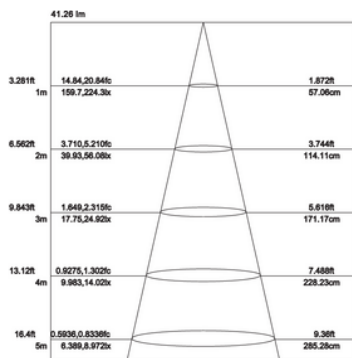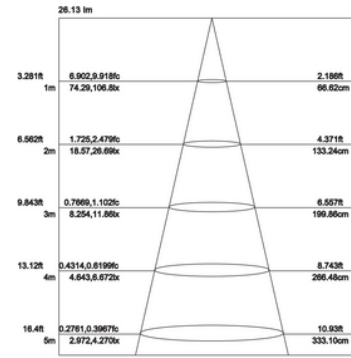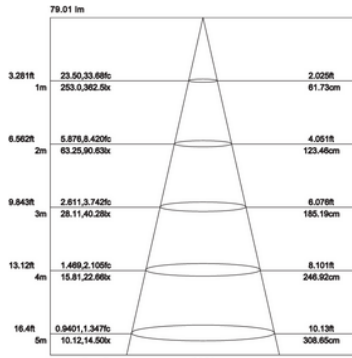


INSTALLATION

- Fix the fixing clamp and light together by M3 screw, then screw tightly.
- Then, fix the expansion pipe in the installation place with a hammer.
- Use spanner to twist the bracket and fix the screw, revolving around the lamp, align the installation hole and expansion pipe hole, then screw ST4 tightly with a screwdriver.
- Finally, adjust the lamp to the correct angle, then screw it tight. The distance between the fixing clamp and clamp can be adjusted.

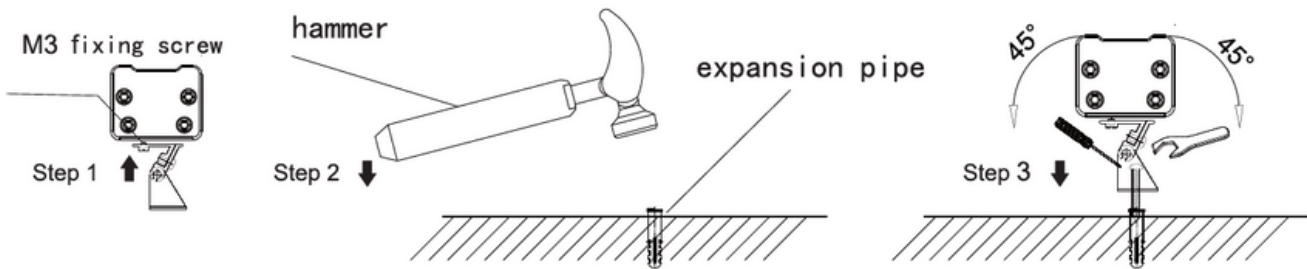

CONNECTION

Steady Color Mode

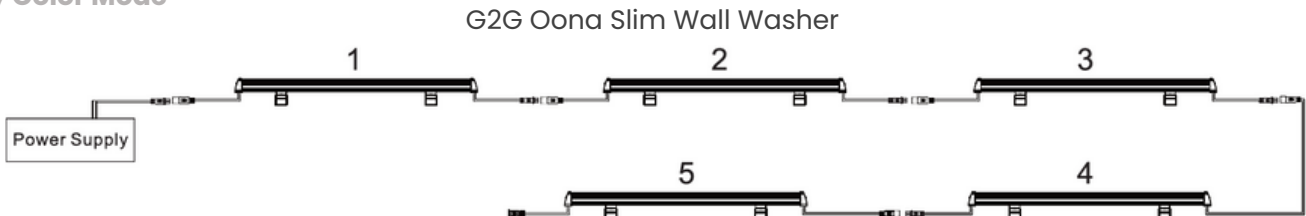

DMX Mode

- Signal Max. connection is 12 pcs fixture every port, if over 13 pcs, then signal splitter or use the same DMX address for all lights.
- Controller for option: Sunlite, Talent II and other DMX controllers.

