


Project:	
Type:	
Catalog #:	



STANDARD

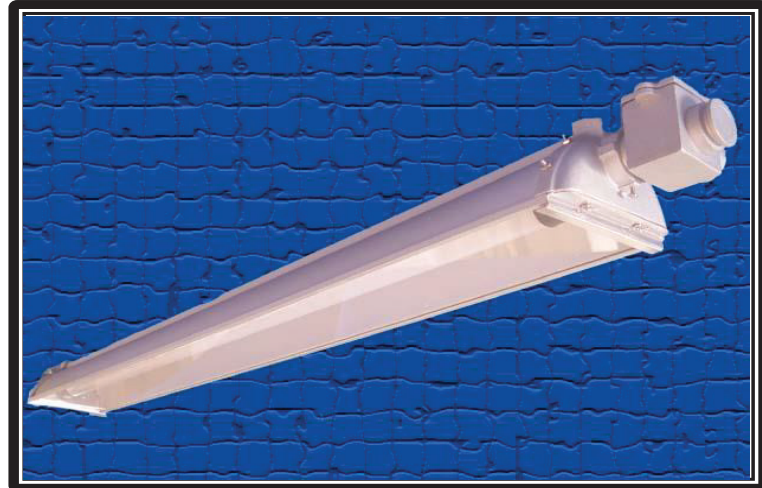

This billboard unit provides high light levels with even distribution, for spot lighting. The unit is weather resistant and suitable for most outdoor applications.

Construction:

- Housing is made of heavy gauge extruded aluminum with die cast end plates and splice box fittings. Housing interior is finished in a baked enamel finish for maximum reflectivity and durability. Splice box is threaded for 3/4" conduit and contains adjusting screws for housing. Lens is clear smooth slide-on acrylic that resists yellowing.

Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp and wet location M 59006648


Mounting

Units are designed to be conduit mounted either individually, tandem, or in a continuous run

WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location M 59006648

DIMENSIONS



Fixture Length

# of Lamps	T5HO	Length
1 or 2	F54T5HO	53"
TANDEM		
Single or Double	F54T5HO	101"

For Tandem Units Multiply Unit above by 2

max weight= 11lbs/53" 15lbs/101"

Ordering Guide

Series	# of Lamps	Lamp Size	Ballast Type	Options
OD	1 2	T5 21 = 21T5 28 = F28T5 T5HO 39 = F39T5 54 = F54T5"	120 = 120V MV = Multivolt E-LW = Electronic .77 BF E-O = Electronic 1.18 BF E-DIM = Dimming Unit	EMB 2BAL

SET LED N = Wired 1 end hot for LED tubes
W/LEDIF = LED ballast driven tubes