

PROJECT	
TYPE	
CATALOG #	



4' 28W, 120-277V Input, 0-10V Dimming

### PRODUCT FEATURES

- Traditional design, narrow body, Vapor Tight fixture, suitable for rugged, demanding applications
- Powered by 0–10V dimming LED drivers
- IP66, suitable for wet location
- Smooth, diffused lens for even appearance
- Stainless steel lens clips
- 0–10V dimming, 10% minimum
- High quality, impact resistant Poly Carbonate lens
- Impact Resistance Rating: IK10
- Ambient operating temperature: –20°C/–4°F to 50°C/122°F
- NEMA 4X rated, protected against corrosion
- Compatible with emergency backups, max of 30C ambient operating temperature with emergency pack installed
- UL Listed 1598
- THD: <20%
- PF: >0.95
- LED chip lifetime: L70>100,000 hours @ 25°C/77°F ambient fixture temperature
- Includes mounting hardware
- ETL Sanitation Listed NSF/ANSI Standard 2 - Food Equipment, Splash Zone (Not for Direct Food Zone)




### PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temp	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
VT-LED-4A-28-840-P	4000K	4'	120-277V	28W	>82	3,580 lm	128 lm/W
VT-LED-4A-28-850-P	5000K	4'	120-277V	28W	>82	3,640 lm	130 lm/W

PROJECT	
TYPE	
CATALOG #	

### PHOTOMETRIC SPECIFICATIONS


#### LUMINOUS INTENSITY DISTRIBUTION

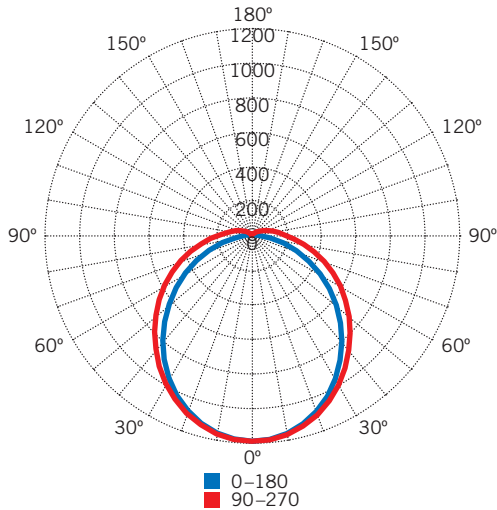

### ZONAL LUMEN SUMMARY

Degree	Flux (Lumens)	% Luminaire
0~10°	111.8 lm	3.06%
0~20°	429.8 lm	11.76%
0~30°	904.9 lm	24.77%
0~40°	1,468.5 lm	40.19%
0~50°	2,047.5 lm	56.04%
0~60°	2,577.4 lm	70.54%
0~70°	3,006.9 lm	82.30%
0~80°	3,304.3 lm	90.44%
0~90°	3,472.2 lm	95.03%
0~100°	3,562.8 lm	97.51%
0~110°	3,613.1 lm	98.89%
0~120°	3,637.4 lm	99.55%
0~130°	3,646.7 lm	99.81%
0~140°	3,649.5 lm	99.88%
0~150°	3,651.1 lm	99.93%
0~160°	3,652.5 lm	99.97%
0~170°	3,653.5 lm	99.99%
0~180°	3,653.8 lm	100.00%

### PHYSICAL SPECIFICATIONS

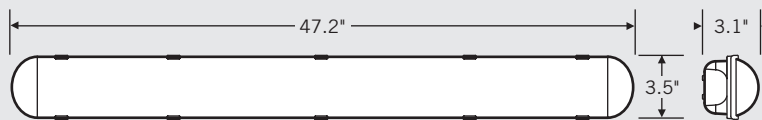

### ORDERING INFORMATION

Catalog Number	Packaging Style	Quantity	Item Status
VT-LED-4A-28-840-P	Carton Pack	4	Active
VT-LED-4A-28-850-P	Carton Pack	4	Active