

PROJECT	
TYPE	
CATALOG #	



4' 63W, 120-277V Input, 0-10V Dimming

PRODUCT FEATURES

- Traditional design, narrow body, Vapor Tight fixture, suitable for rugged, demanding applications
- Powered by 0–10V dimming LED drivers
- IP66, suitable for wet location
- Smooth, diffused lens for even appearance
- Stainless steel lens clips
- 0–10V dimming, 10% minimum
- High quality, impact resistant Poly Carbonate lens
- Impact Resistance Rating: IK10
- Ambient operating temperature: –20°C/–4°F to 45°C/114°F
- NEMA 4X rated, protected against corrosion
- Compatible with emergency backups, max of 30C ambient operating temperature with emergency pack installed
- UL Listed 1598
- THD: <20%
- PF: >0.95
- LED chip lifetime: L70>100,000 hours @ 25°C/77°F ambient fixture temperature
- Includes mounting hardware
- ETL Sanitation Listed NSF/ANSI Standard 2 - Food Equipment, Splash Zone (Not for Direct Food Zone)




PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temp	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
VT-LED-4A-63-840-P	4000K	4'	120-277V	63W	>82	8,065 lm	128 lm/W
VT-LED-4A-63-850-P	5000K	4'	120-277V	63W	>82	8,190 lm	130 lm/W

PROJECT	
TYPE	
CATALOG #	

PHOTOMETRIC SPECIFICATIONS


LUMINOUS INTENSITY DISTRIBUTION

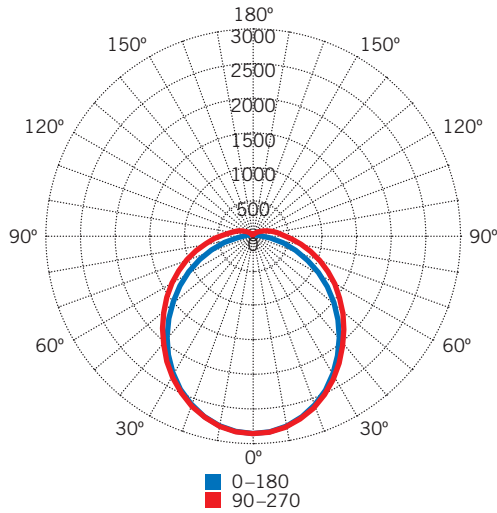

ZONAL LUMEN SUMMARY

Degree	Flux (Lumens)	% Luminaire
0-10°	270.3 lm	3.21%
0-20°	1,037.7 lm	12.31%
0-30°	2,178.8 lm	25.84%
0-40°	3,518.0 lm	41.72%
0-50°	4,873.3 lm	57.79%
0-60°	6,090.8 lm	72.23%
0-70°	7,058.0 lm	83.69%
0-80°	7,710.7 lm	91.43%
0-90°	8,065.8 lm	95.65%
0-100°	8,248.9 lm	97.82%
0-110°	8,346.6 lm	98.98%
0-120°	8,392.6 lm	99.52%
0-130°	8,410.7 lm	99.74%
0-140°	8,418.0 lm	99.82%
0-150°	8,423.7 lm	99.89%
0-160°	8,428.5 lm	99.95%
0-170°	8,431.9 lm	99.99%
0-180°	8,433.0 lm	100.00%

PHYSICAL SPECIFICATIONS



ORDERING INFORMATION

Catalog Number	Packaging Style	Quantity	Item Status
VT-LED-4A-63-840-P-CP	Carton Pack	4	Active
VT-LED-4A-63-850-P-CP	Carton Pack	4	Active