

Recessed Direct-Indirect Center Basket

Project:	
Type:	
Catalog #:	



STANDARD



This attractive 1'x4' Direct/Indirect Center Basket Troffer Unit combines the energy efficient performances of electronic ballast with soft low-glare contemporary design. The RDI-C unit is designed for use with T5, and T8 lamps to provide uniform balanced illumination, consistent distribution and high end appearance. Designed for use in most offices and retail establishments this unit is as efficient as it is attractive

Construction:

- Housing is die formed from heavy gauge steel and is finished in a matte white polyester powder coating for maximum reflectivity and durability. Perforated center basket incorporates hinges from both sides to allow for easy lamp replacement.

Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location


Mounting

Designed for use in inverted T Bar ceilings, this fixture comes with integral earthquake clips built into end plate. All units are equipped access plates for easy wiring as well as 7/8" knockouts in top, sides and end of all units.

WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing
- UL Certified for damp location

DIMENSIONS

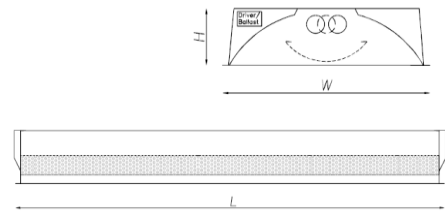

Size	Lamps	H	W	L
1x2	T8/T5/LED	3.25	11.7	23.7
1X4	T8/T5/LED	3.25	11.7	47.7

max weight= 20lbs

Ordering Guide

1X4 RDI LED

Series

1X4 RDI LED

Size

12= 1X2
14= 1X4

Lumens

1X2
3220 (17W)
4480 (24W)
5705 (30W)

Color

3K
35K
4K
5K

Options

EMB = Emergency Ballast
FR = Frosted Lens over LED Board

*\$!%j`ck`j`c`Hj`YXja`a`j`b`g`h`U`b`X`U`F`d`Y`f`
Z`l`h`i`f`Y`

1X4
6910 (37W)
8640 (48W)
11797 (70W)

*<`j`[\`Y`f`U`b`X`W`g`f`c`a`"i`a`Y`b`d`U`W`U`j`Y`g`
U`j`U`j`U`W`Y`i`d`c`b`f`Y`e`i`Y`g`h`