




KB LIGHTING

FRAME PANEL


2X2, 2X4

CCT SELECT


WATTAGE SELECT




2x4'







FRAME PANEL
IN USE



2x2'

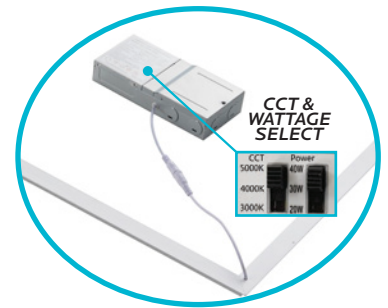

CCT &
WATTAGE
SELECT



SPECIFICATIONS

ELECTRICAL


MODEL	DESCRIPTION	POWER	LUMEN	EFFICACY	INPUT VOLTS	DIMMABLE	FREQUENCY	LIFETIME	POWER FACTOR
24185	LED2X2FRAME/PNL/3WO/3CCT/D	20W	2500	125	100-277V	0-10V	50/60Hz	50,000	<0.95
		30W	3750						
		40W	5000						
24187	LED2X4FRAME/PNL/3WO/3CCT/D	40W	5000	125	100-277V	0-10V	50/60Hz	50,000	<0.95
		50W	6250						
		60W	7500						

PHOTOMETRIC

GENERAL

MODEL	COLOR (CCT)	TEMP	FLOOD	CRI	CASE SIZE	MERCURY FREE	ETL LISTED	DLC PREMIUM
24185	3000K/4000K/5000K	SOFT/COOL/BRIGHT	120°	80	6	YES	YES	YES
24187	3000K/4000K/5000K	SOFT/COOL/BRIGHT	120°	80	6	YES	YES	YES

DIMENSIONS

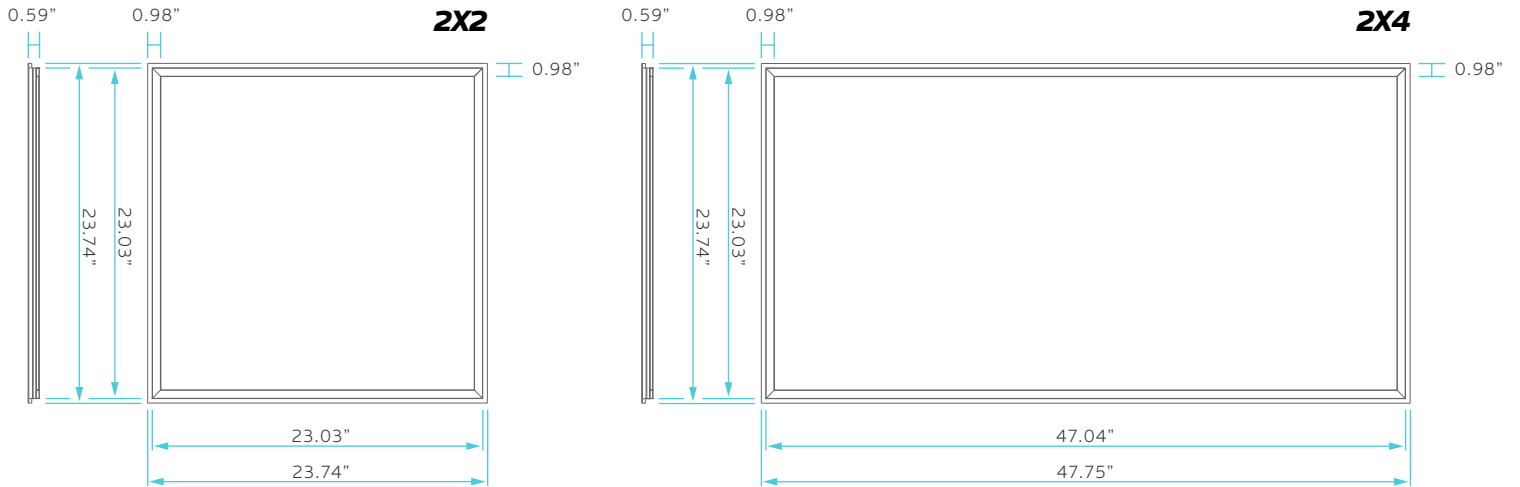

INSTALLATION

RECESSED MOUNT

