

## Vandal Resistant Wall Unit

Project:	
Type:	
Catalog #:	



### STANDARD



This vandal proof covered wall unit is designed to provide maximum lumen output in areas such as hallways, bathrooms, kitchens, stairways, and hospitals as well as high abuse areas. An assortment of options allows this utility wall and surface mounted unit to satisfy a variety of lighting needs.

### Construction:

- Housing is designed from heavy gauge die formed steel and finished in either baked white enamel or polyester powder coating. Socket plate is riveted to housing adding to the structural support of the fixture. Lens is .125 prismatic polycarbonate lens. The ends are held by tamper resistant screws.

### Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location M 59006648

### Mounting


Unit is equipped with holes and 7/8" knockouts in housing for surface mounting. Fixture may be mounted individually or with optional joiner bands may be used in a continuous run.

### WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location M 59006648



### DIMENSIONS

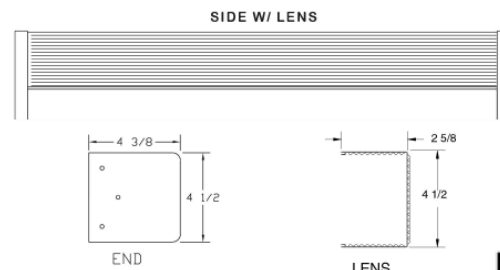

T8	
SIZE	LENGTH
(1 OR 2) 17W	24-1/4
(1 OR 2) 25W	36-1/4
(1 OR 2) 32W	48-1/4

### Ordering Guide

Max weight = 12lbs / 48"

Series	# of Lamps	Lamp Size	Ballast Type	Options	
558	1 [A] [A] [ ] 2 [A] [A] [ ]	<b>T8</b> 17 = F17V1 25 = F25V1 32 = F32V1  <b>T12</b> 15 = F15T12 20 = F20T12" 30 = F30T12 40 = F40T12	<b>T5</b> 14 = F14T5 21 = 21T5 28 = F28T5  <b>T5HO</b> 24 = F24T5 39 = F39T5 54 = F54T5"	<b>120 = 120V</b> <b>MV = Multivolt</b> E-LW = Electronic .77 BF E-O = Electronic 1.18 BF E-DIM = Dimming Unit  <b>SET LED N =</b> Wired 1 end hot for LED tubes <b>SET LED N/S =</b> Wired 2 ends hot for LED tubes <b>W/LEDIF =</b> LED ballast driven tubes	<b>EMBA</b> = End Mounting Bracket <b>2BAL</b> = 2 Ballast <b>REFS</b> = Silver Reflector <b>OCC-E</b> = External Occupancy Sensor <b>OCC-I</b> = Internal Occupancy sensor <b>BI-LEV</b> = Bi-level dimming system <b>O</b> = grounded outlet <b>TOG</b> = Toggle Switch <b>PULL</b> = Pull chain switch <b>NL</b> = Night Light <b>3WAY</b> = 3 way system <b>PRIS</b> = Prismatic lens <b>DL</b> = Down light only