


Project:	
Type:	
Catalog #:	



Available with either Spade or Bullnose End cap:

### STANDARD

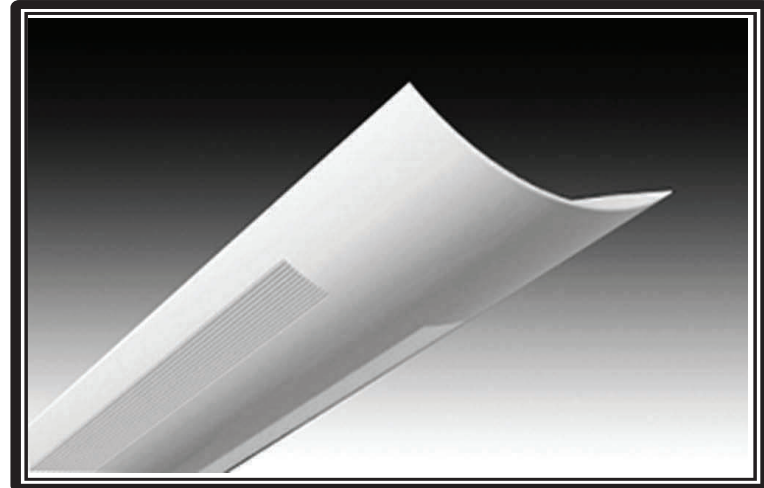

Specification grade, suspended, high performance architectural luminaire. For use in indoor applications where a T8, T5, T5HO direct/indirect luminaire with maximum uplight as well as glare-free downlight is required. Available as individual fixtures or with end and intermediate units for mounting in continuous rows. Fixtures designed to mount on 4 foot and 8 foot centers.

### Construction:

- Durable cold rolled 20 ga. steel body. Sufficient knock-outs provided for connections and through wiring. Fixture is 2 inches in height. white powder coated finish
- Optics: 95% enhanced anodized aluminum slotted reflector and semi-perforated housing.

### Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location

**Light Distribution: 92% Indirect  
8% Direct**

### Mounting

Canopy comes standard for mounting. Canopies equipped with one live side with SJT cord and air craft cable adjustable 1-5 feet, as well as a non live side with air craft cable adjustable 1-5 feet



Spade




Bullnose

### WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location



### DIMENSIONS

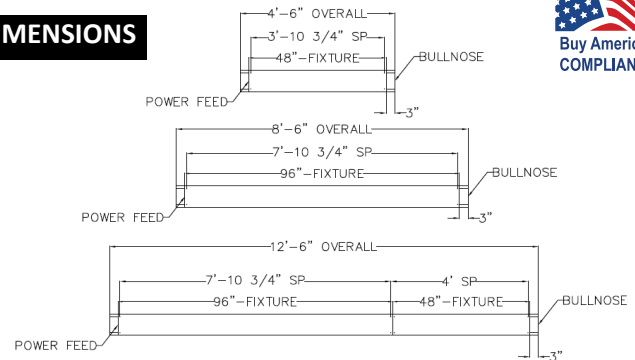

### Ordering Guide

850-LED

Series	Length
850-LED	4FT = 4 foot 8FT = 8 foot XFT = Continuous row mounting

LUMENS PER 4FT
4100 (41W) 3475 (38.5W) 4650 (47W)

Ballast Type
MV = Multivolt

Options
BE = Bull nose end SE = Spade end EMB = End Mount Bracket

0-10v low voltage dimming standard per fixture

Higher and custom lumen packages available upon request