


Project:	
Type:	
Catalog #:	



Available with either Spade or Bullnose End cap:

STANDARD

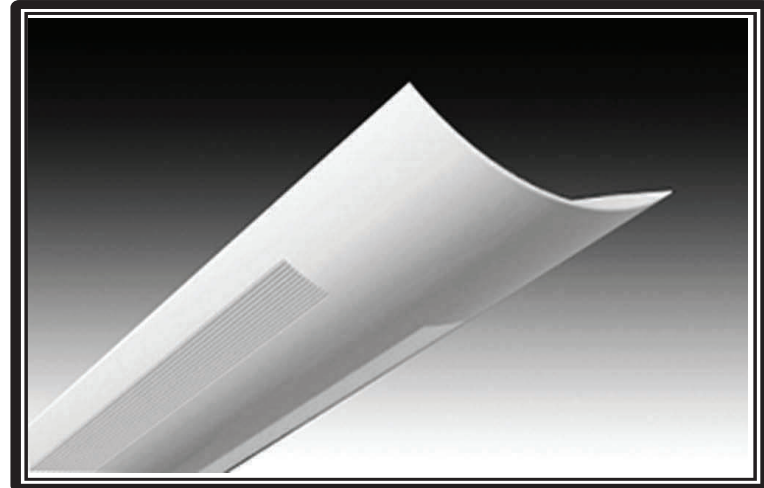

Specification grade, suspended, high performance architectural luminaire. For use in indoor applications where a T8, T5, T5HO direct/indirect luminaire with maximum uplight as well as glare-free downlight is required. Available as individual fixtures or with end and intermediate units for mounting in continuous rows. Fixtures designed to mount on 4 foot and 8 foot centers.

Construction:

- Durable cold rolled 20 ga. steel body. Sufficient knock-outs provided for connections and through wiring. Fixture is 2 inches in height. white powder coated finish
- Optics: 95% enhanced anodized aluminum slotted reflector and semi-perforated housing.

Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location M 59006648

**Light Distribution: 92% Indirect
8% Direct**

Mounting

Canopy comes standard for mounting. Canopies equipped with one live side with SJT cord and air craft cable adjustable 1-5 feet, as well as a non live side with air craft cable adjustable 1-5 feet



Spade




Bullnose

WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location M 59006648



DIMENSIONS

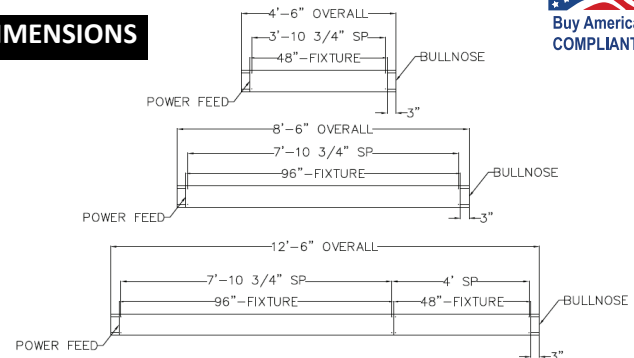

Ordering Guide

Series	Length	# of Lamps	Lamp Size	Ballast Type	Options
850	4FT = 4 foot 8FT = 8 foot XFT = Continuous row mounting	2 = 2 lamp 3 = 3 lamp (T5 only)	T8 32 = F28T8 T5 28 = F28T5 T5HO 54 = F54T5"	120 = 120V MV = Multivolt E-LW = Electronic .77 BF E-O = Electronic 1.18 BF E-DIM = Dimming Unit	BE = Bull nose end SE = Spade end EMB 2BAL
				SET LED N = Wired 1 end hot for LED tubes SET LED N/S = Wired 2 ends hot for LED tubes W/LEDIF = LED ballast driven tubes	