

PROJECT	
TYPE	
CATALOG #	



Compact 210W High-Performance LED Area Light, 120–277V Input, Bronze Housing, Multiple Mounting, Optics, and Control options

PRODUCT FEATURES

- Compact, low-profile design delivers high-performance illumination and improves application site aesthetics
- Heavy-duty, die-cast aluminum housing with ample heat sinking for enhanced thermal performance
- True U0 design for Dark Sky compliant performance eliminates undesirable sky glow
- Integrated NEMA/ANSI C136.10 3-pin twist-lock receptacle with shorting cap, standard on all fixtures, simplifies ordering requirements for photo control needs
- Precision-crafted optics, available with type II, III, IV, and V patterns, to meet diverse requirements from general purpose to specification-grade applications
- Integral latch design for hassle-free, hinged access to driver compartment
- Four contractor-friendly mounting options available (sold separately): slip fitter mount, adjustable pole mount for square and round poles, fixed pole mount for square and round poles, and trunnion mount
- Bi-level occupancy sensors and twist-lock photocell accessories available
- Reversible glare shield available, suitable for backside (house-side) or frontside (street-side) shielding
- Powered by 0–10V dimming LED driver featuring 12V AUX power tap, 6kV surge protection
- Ambient operating temperature: –40°C/–40°F to 50°C/122°F
- UL Certified for wet locations, IP65
- 0–10V dimming, 10% min
- Power factor: >0.95
- THD: <20%
- LED chip lifetime: L70 >100,000 hrs @ 25°C/77°F ambient fixture temp
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions



ELECTRICAL SPECIFICATIONS

Catalog Number	Wattage	Lumens	Efficacy	Dimming	Color Temp	CRI	Dist Type*	Input Voltage	Rated Life	Legacy Equivalent	Housing Color**	Additional Feature
AL-LED-L1-3-210-840-NM	210W	29,190 lm	139 lm/W	0–10V	4000K	>80	III	120–277V	50,000 hrs	400–750W	Bronze	10kV external surge protection included
AL-LED-L1-3-210-850-NM		29,610 lm	141 lm/W		5000K		III					
AL-LED-L1-5-210-840-NM		29,400 lm	140 lm/W		4000K		V					
AL-LED-L1-5-210-850-NM		29,820 lm	142 lm/W		5000K		V					

* Fixtures with Type 2 (II) and Type 4 (IV) optics are available and assembled to order. Lead times may apply. Please see catalog number breakdown for full ordering code details.

** Fixtures (and mounts) with alternate housing colors are available and made to order. Extended lead times apply. Please see catalog number breakdown for full ordering code details.


PROJECT	
TYPE	
CATALOG #	

MOUNTING BRACKET OPTIONS (SOLD SEPARATELY)

SLIP FITTER MOUNT

Fits 2 3/8" tennon; Bronze

Catalog Number	UPC	Easy Code
KT-ALED-SF-1-KIT	843654131641	JRH-74

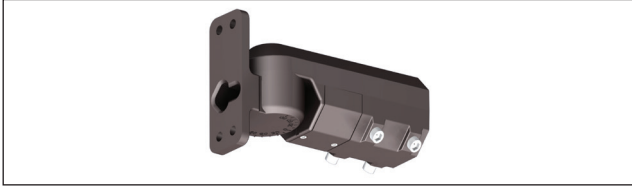

ADJUSTABLE POLE MOUNT

For round or square pole; Bronze

Catalog Number	UPC	Easy Code
KT-ALED-PMA-1-KIT	843654131634	DAQ-87



FIXED POLE MOUNT

For round or square pole; Bronze




Catalog Number	UPC	Easy Code
KT-ALED-PM-1-KIT	843654131627	QVG-29



TRUNNION MOUNT

Bronze


Catalog Number	UPC	Easy Code
KT-ALED-TM-1-KIT	843654131658	GTH-37

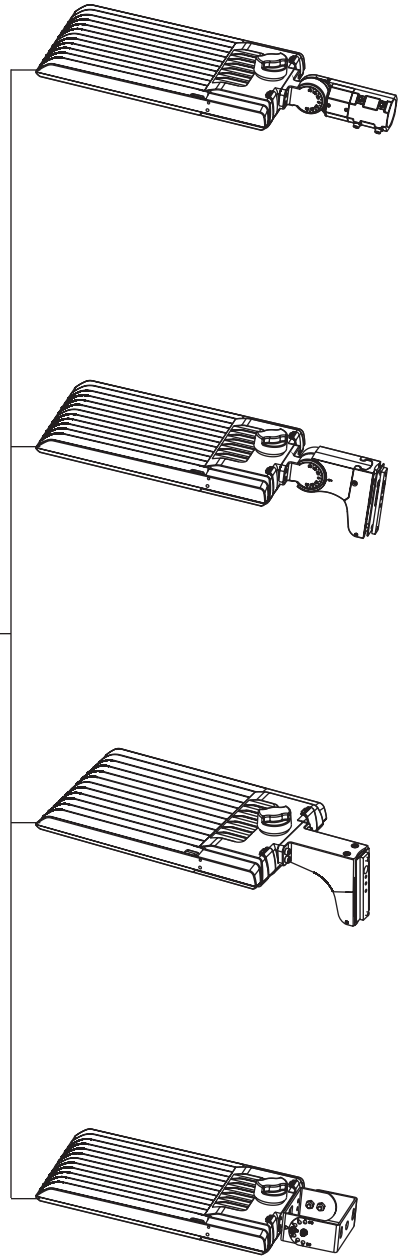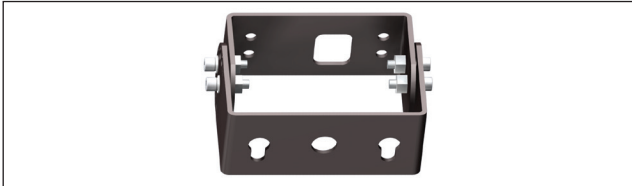


PROJECT	
TYPE	
CATALOG #	

PHYSICAL SPECIFICATIONS

LED AREA LIGHT FIXTURE

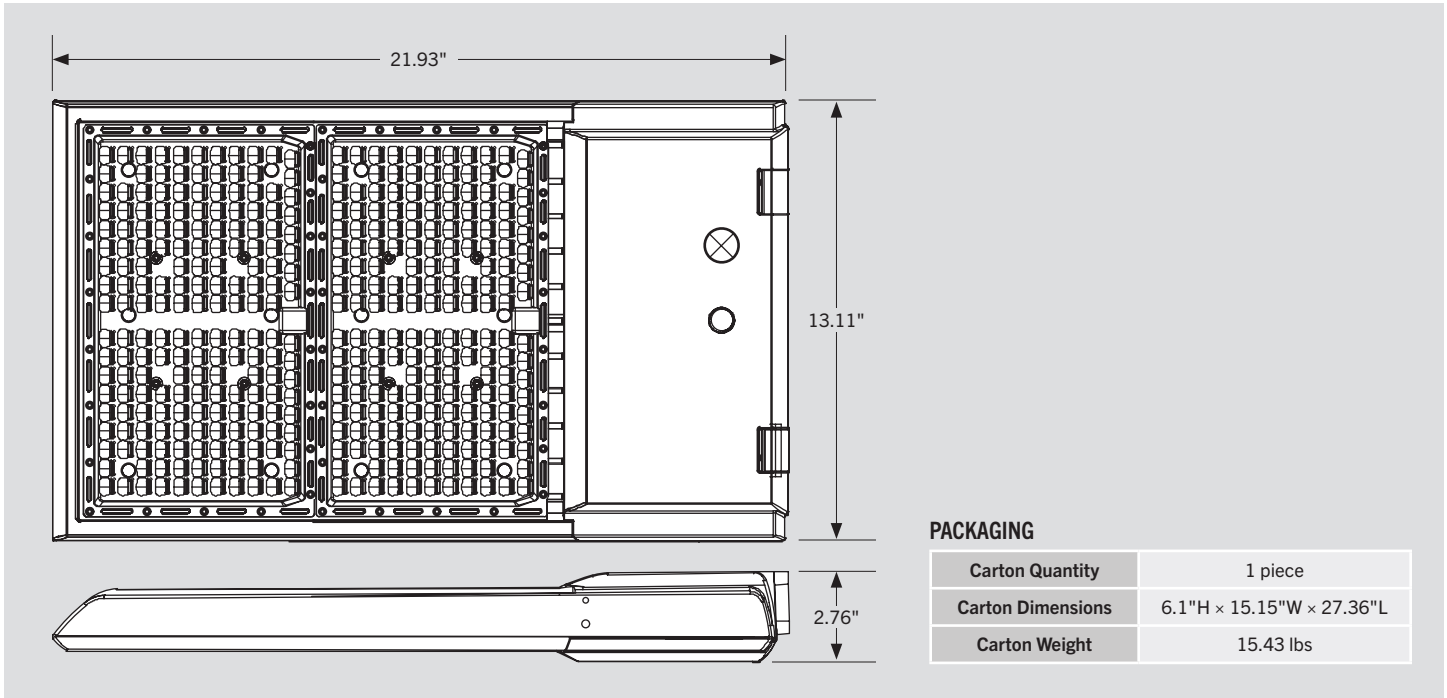


POLE MOUNT (ADJUSTABLE OR FIXED) DRILLING HOLES

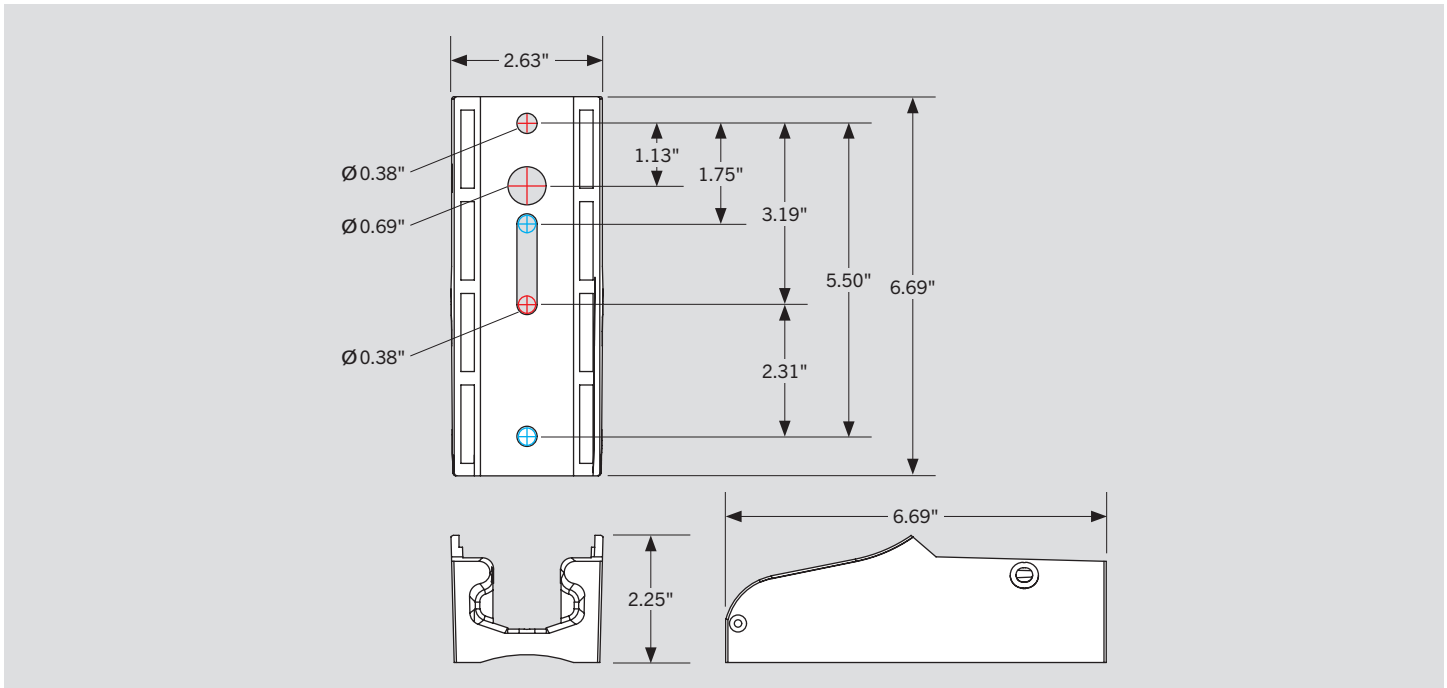

PROJECT	
TYPE	
CATALOG #	


WIRING DIAGRAM

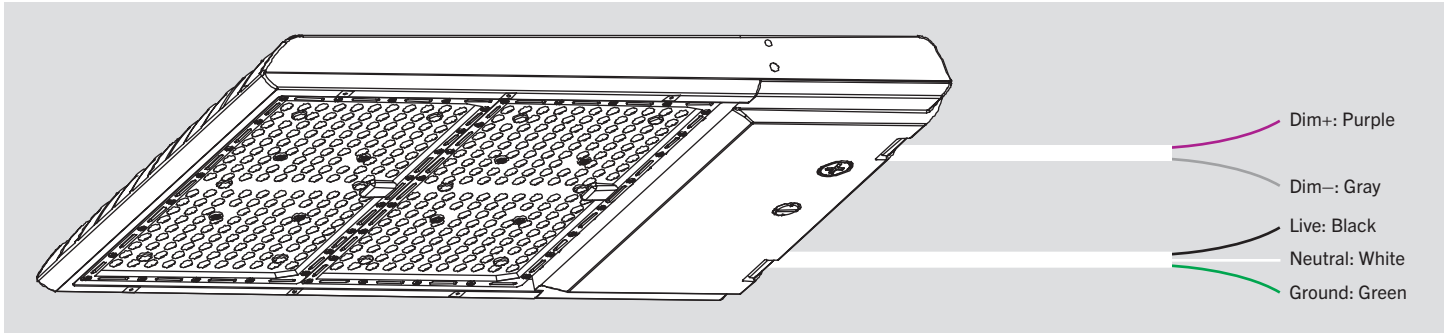

LIGHT DISTRIBUTION PATTERN


TYPE 3 (III)

Pole-mount view from above; Area light mounted at 30'

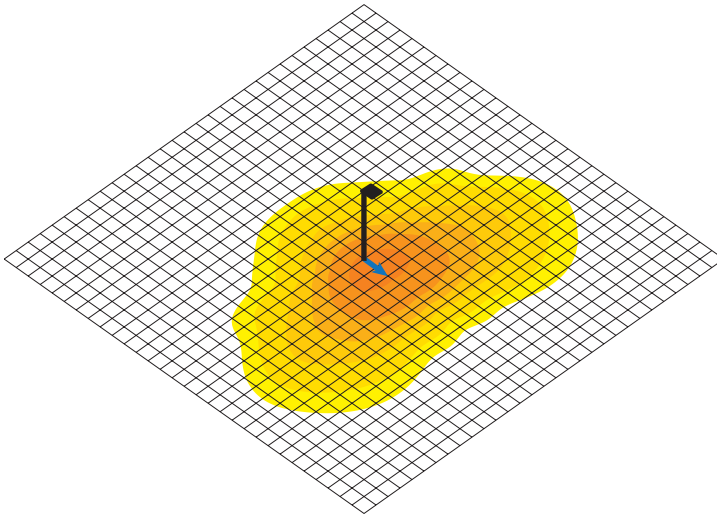


TYPE 5 (V)


Pole-mount view from above; Area light mounted at 30'

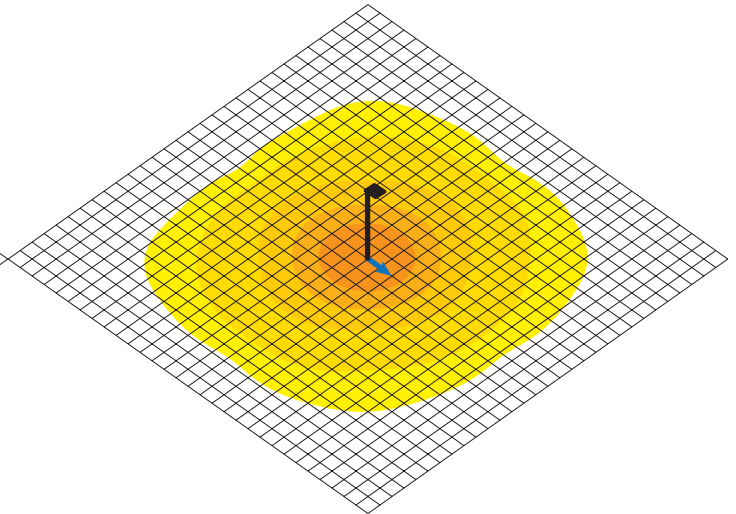

- Photometric layout for general reference only
- Grid dimension: 10 × 10 sq ft




- Photometric layout for general reference only
- Grid dimension: 10 × 10 sq ft




PROJECT	
TYPE	
CATALOG #	

PHOTOMETRIC SPECIFICATIONS (TYPE 3 [III])

ISOCANDELA PLOT

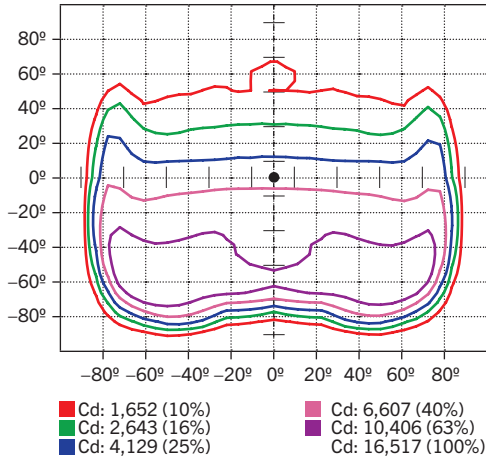

LUMINOUS INTENSITY DISTRIBUTION

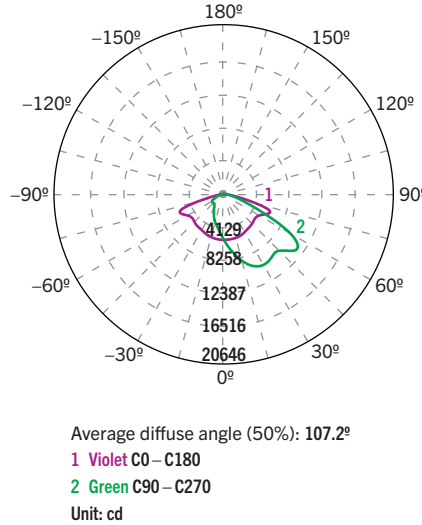

FLUX DISTRIBUTION


Zone	Lumens	% Luminaire
Forward Light	23,505 lm	79.4%
0°–30°	3,279 lm	11.1%
30°–60°	11,305 lm	38.2%
60°–80°	8,383 lm	28.3%
80°–90°	538 lm	1.8%
Back Light	6,083 lm	20.6%
0°–30°	1,663 lm	5.6%
30°–60°	2,807 lm	9.5%
60°–80°	1,495 lm	5.1%
80°–90°	118 lm	0.4%
Up Light	0 lm	0.0%
90°–100°	0 lm	0.0%
100°–180°	0 lm	0.0%

BUG* Rating	
Asymmetrical Luminaire Types	
Type I, II, III, IV	B3 U0 G4
Quadrilateral Symmetrical Luminaire Types	
Type V, Area Light	B3 U0 G4


* Backlight, Uplight, Glare

PHOTOMETRIC SPECIFICATIONS (TYPE 5 [V])

ISOCANDELA PLOT

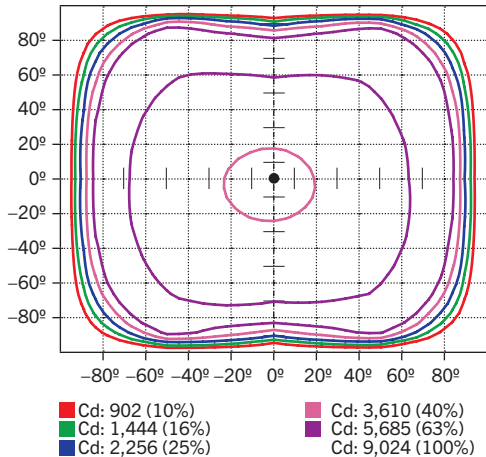

LUMINOUS INTENSITY DISTRIBUTION

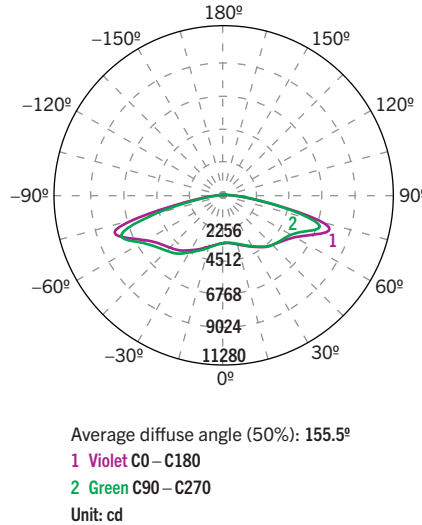

FLUX DISTRIBUTION

Zone	Lumens	% Luminaire
Forward Light	14,472 lm	48.9%
0°–30°	1,518 lm	5.1%
30°–60°	5,638 lm	18.1%
60°–80°	6,347 lm	21.5%
80°–90°	1,239 lm	4.2%
Back Light	15,114 lm	51.1%
0°–30°	1,597 lm	5.4%
30°–60°	5,872 lm	19.8%
60°–80°	6,799 lm	23.0%
80°–90°	847 lm	2.9%
Up Light	0 lm	0.0%
90°–100°	0 lm	0.0%
100°–180°	0 lm	0.0%


BUG* Rating	
Asymmetrical Luminaire Types	
Type I, II, III, IV	B5 U0 G5
Quadrilateral Symmetrical Luminaire Types	
Type II	B5 U0 G5

* Backlight, Uplight, Glare


PROJECT	
TYPE	
CATALOG #	

PHOTOMETRIC SPECIFICATIONS (TYPE 4 [IV])

ISOCANDELA PLOT

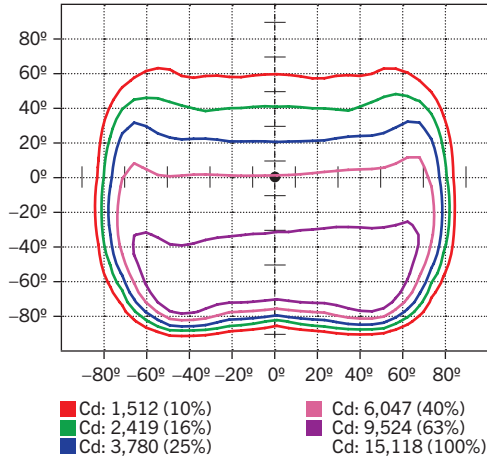

LUMINOUS INTENSITY DISTRIBUTION

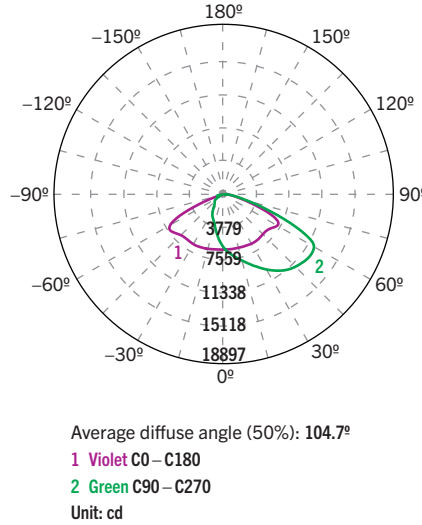

FLUX DISTRIBUTION


Zone	Lumens	% Luminaire
Forward Light	22,653 lm	76.2%
0°–30°	3,215 lm	10.8%
30°–60°	11,253 lm	37.8%
60°–80°	7,764 lm	26.1%
80°–90°	421 lm	1.4%
Back Light	7,087 lm	23.8%
0°–30°	1,924 lm	6.5%
30°–60°	3,478 lm	11.7%
60°–80°	1,525 lm	5.1%
80°–90°	161 lm	0.5%
Up Light	0 lm	0.0%
90°–100°	0 lm	0.0%
100°–180°	0 lm	0.0%

BUG* Rating	
Asymmetrical Luminaire Types	
Type I, II, III, IV	B3 U0 G4
Quadrilateral Symmetrical Luminaire Types	
Type V, Area Light	B3 U0 G4


* Backlight, Uplight, Glare

PHOTOMETRIC SPECIFICATIONS (TYPE 2 [III])

ISOCANDELA PLOT

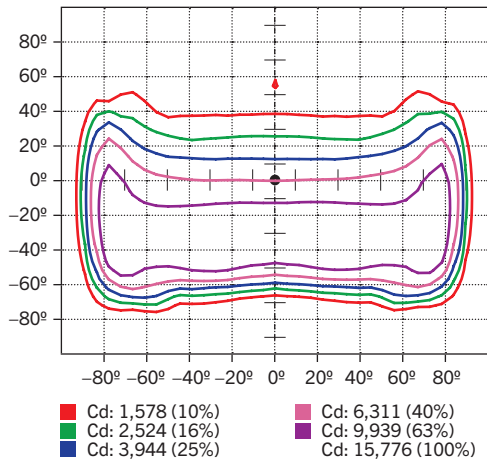

LUMINOUS INTENSITY DISTRIBUTION

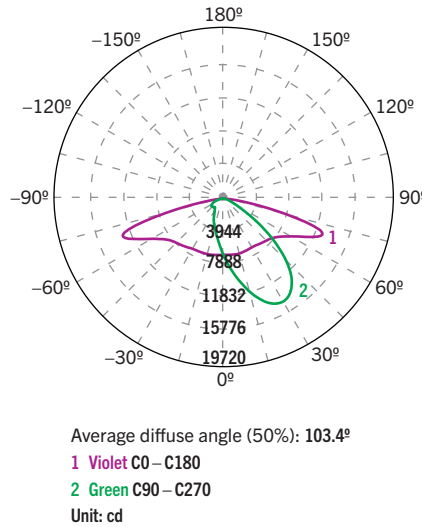

FLUX DISTRIBUTION

Zone	Lumens	% Luminaire
Forward Light	23,114 lm	77.1%
0°–30°	4,324 lm	14.4%
30°–60°	12,905 lm	43.0%
60°–80°	5,557 lm	18.5%
80°–90°	329 lm	1.1%
Back Light	6,874 lm	22.9%
0°–30°	1,779 lm	5.9%
30°–60°	2,960 lm	9.9%
60°–80°	1,980 lm	6.6%
80°–90°	155 lm	0.5%
Up Light	0 lm	0.0%
90°–100°	0 lm	0.0%
100°–180°	0 lm	0.0%

BUG* Rating	
Asymmetrical Luminaire Types	
Type I, II, III, IV	B3 U0 G3
Quadrilateral Symmetrical Luminaire Types	
Type V, Area Light	B3 U0 G3















* Backlight, Uplight, Glare

PROJECT	
TYPE	
CATALOG #	

EPA SPECIFICATIONS

Large-Size Fixture Housing

Conditions: Horizontal winds only for calculations. Worst case total projected area used for calculations. All drag coefficients are set as worst case 1.2. For details on exact EPA calculations and assumptions, please contact your sales representative.

EPA Calcs (1.2*ft ² View)		Single Fixture	2 Fixtures at 90°	2 Fixtures at 180°	3 Fixtures at 90°	3 Fixtures at 120°	4 Fixtures at 90°	2 Fixtures Side-by-Side	3 Fixtures Side-by-Side	4 Fixtures Side-by-Side
Mounting Application	Fixture Position									
Adjustable Pole Mount 	Horizontal	0.62 sq. ft.	0.90 sq. ft.	1.24 sq. ft.	1.42 sq. ft.	1.48 sq. ft.	1.42 sq. ft.	0.74 sq. ft.	1.11 sq. ft.	1.48 sq. ft.
Adjustable Pole Mount 	45°	1.85 sq. ft.	2.43 sq. ft.	1.85 sq. ft.	3.01 sq. ft.	4.42 sq. ft.	3.01 sq. ft.	3.70 sq. ft.	5.55 sq. ft.	7.40 sq. ft.
Slip Fitter Mount 	Horizontal	0.60 sq. ft.	0.98 sq. ft.	1.20 sq. ft.	1.53 sq. ft.	1.57 sq. ft.	1.53 sq. ft.	0.86 sq. ft.	1.30 sq. ft.	1.73 sq. ft.
Slip Fitter Mount 	45°	1.92 sq. ft.	2.51 sq. ft.	1.92 sq. ft.	3.09 sq. ft.	4.39 sq. ft.	3.09 sq. ft.	3.84 sq. ft.	5.76 sq. ft.	7.68 sq. ft.
Slip Fitter Mount 	Vertical	2.59 sq. ft.	3.19 sq. ft.	2.59 sq. ft.	3.80 sq. ft.	4.07 sq. ft.	3.80 sq. ft.	5.18 sq. ft.	7.77 sq. ft.	10.35 sq. ft.

ORDERING INFORMATION

ORDER CODE	PACK QTY.	UPC	Easy Code
AL-LED-L1-3-210-840-NM	1	843654135649	JFB-58
AL-LED-L1-3-210-850-NM	1	843654135656	SDQ-87
AL-LED-L1-5-210-840-NM	1	843654135663	BNG-84
AL-LED-L1-5-210-850-NM	1	843654135670	LXS-54