

# BPL-LED-24-50PS-8CSA BACKLIT LED PANEL LIGHT

PROJECT	
TYPE	
CATALOG #	



2'x4' LED panel light, 30, 40 and 50W,  
120-277V input, 0-10V dimming

## PRODUCT FEATURES

- CCT Selectable (3500/4000/5000K)
- Wattage Selectable (50,40,30W)
- Aluminum frame featuring stepped edge design detail and gloss white paint for improved aesthetics
- Suitable for recessed or surface mount (with optional accessories)\*
- Construction features precise optical lenses over each individual LED, offering optimal light diffusion and consistent surface illumination, with no risk of yellowing over product lifetime
- New backlit style design; fits standard T-grid ceilings
- Suitable for damp locations
- Powered by 0-10V dimmable LED driver with built-in junction box
- Compatible with LED emergency backup
- Over 50% energy savings compared to traditional fluorescent troffers
- Operating temp range -20°C/-4°F to 40°C/104°F

\* For use in non-fire rated installations only



## PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Wattage	Color Temperature	Lumen Output	CRI	Power Factor	Efficacy	Lifetime
KT-BPLED50PS-24-8CSA-VDIM*	120-277V	50W	3500K	5,500	>80	>0.9	110 lm/W	50,000 Hours
			4000K	5,600			112 lm/W	
			5000K	5,600			112 lm/W	
	120-277V	40W	3500K	4,600			115 lm/W	
			4000K	4,700			118 lm/W	
			5000K	4,700			118 lm/W	
	120-277V	30W	3500K	3,600			120 lm/W	
			4000K	3,700			123 lm/W	
			5000K	3,700			123 lm/W	


### ONE CATALOG NUMBER WITH 9 DIFFERENT OPTIONS

\* Preset to highest lumen output (40W / 5000K)


\* Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017.

## PHOTOMETRIC SPECIFICATIONS

### ISOCANDELA PLOT

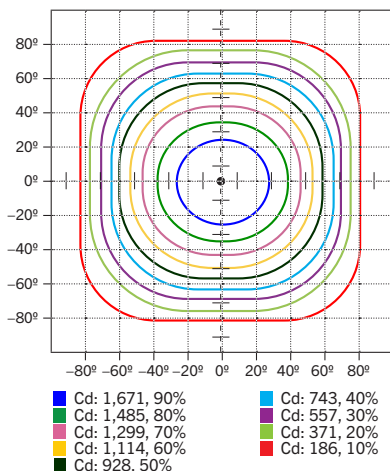

### POLAR CANDELA DISTRIBUTION

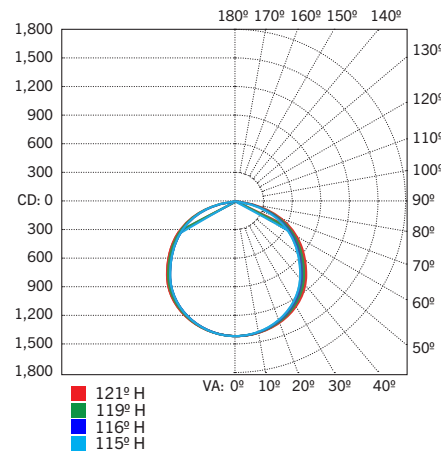


### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-60	4,351.0	76.7%
60-90	1,315.5	23.2%
0-90	5,666.5	99.9%
90-180	3.7	0.06%
0-180	5,670.2	100%

PROJECT	
TYPE	
CATALOG #	

### PHYSICAL SPECIFICATIONS

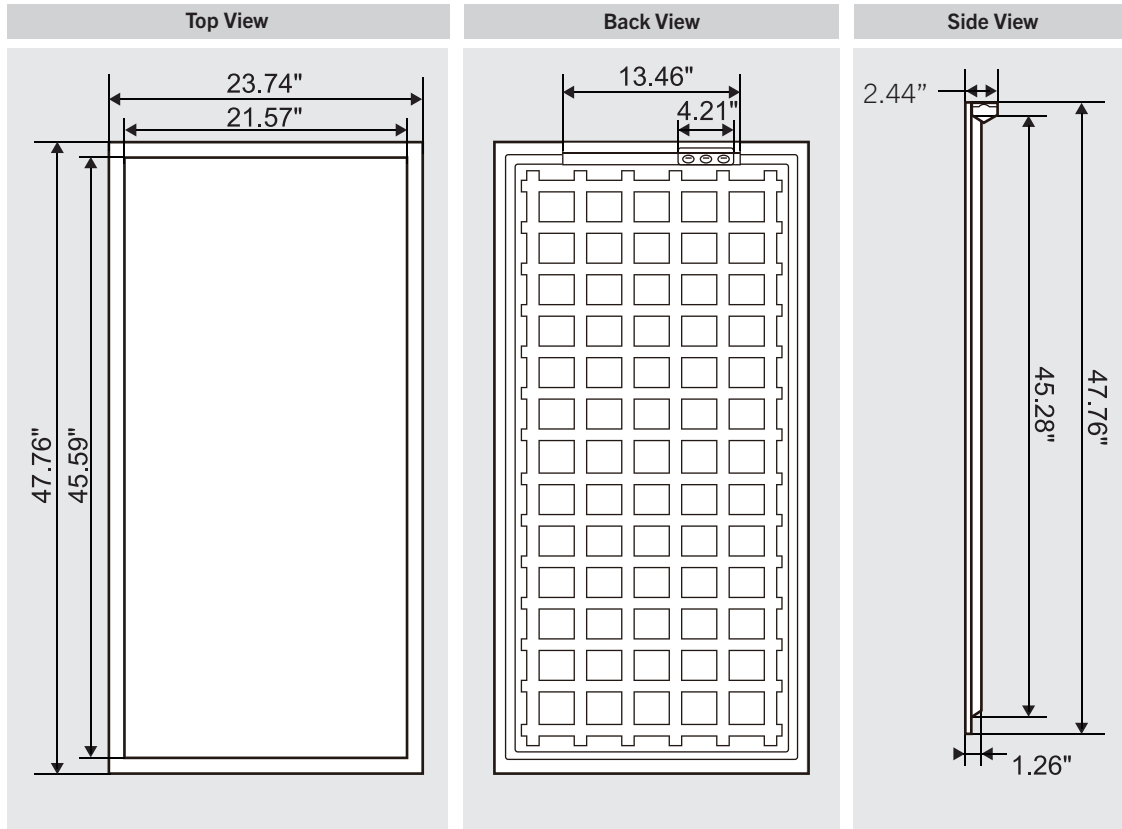

### WEIGHT INFORMATION

1 Piece	1 Carton
11.5 lbs	23 lbs

### ORDERING INFORMATION

CATALOG NUMBER	CARTON QTY.	UPC
KT-BPLED50PS-24-8CSA-VDIM	2	843654127873