



STANDARD



ILLUMINATION

- Two fully adjustable 12W, glare-free lamp heads with field installable 3rd emergency lighting head included.
- Knockouts provided on sides of unit to relocate lamp heads.
- High performance smooth metal reflector and glass lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red LED exit sign illumination.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting hardware provided for back surface wall mount.
- Knockouts provided for conduit feed applications.


HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Injection-molded, engineering grade, high-impact, thermoplastic heads.
- Field removable steel knockout Chevron directional indicators.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

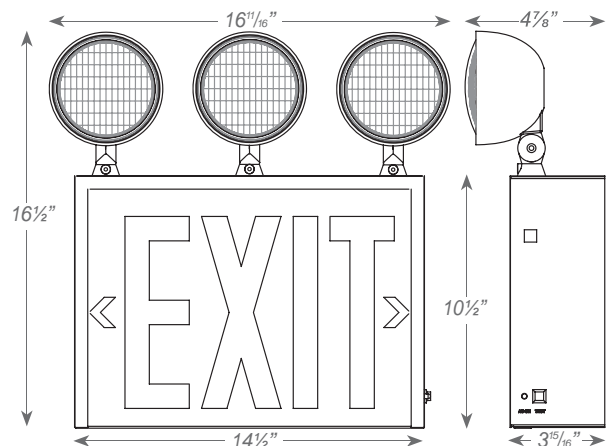

ORDERING INFORMATION

Sample Part Number: **CNYXTE1RW3**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	No. of HEADS
CNYXTE	1 Single Face	R Red	W White B Black	3 Standard NH No Lamp Heads