

PROJECT	
TYPE	
CATALOG #	



105W, 120–277V Input, 0–10V Dimming

DESCRIPTION

Complete LED High Bay Fixture | Dual Bar Design

PRODUCT FEATURES

- Powered by 0–10V dimming LED drivers
- THD: <20%
- Power factor >0.9
- L70 >50,000 hours lifetime
- Frosted lens eliminates glare
- 0–10V dimming, 10% minimum
- Ambient operating temperature: –20°C/–4°F to 50°C/122°F
- Compatible with emergency LED drivers
- Eligible for DLC multiple listing
- Mounting via V-hooks or chain
- Compatible with 480–277V step down transformers




PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temperature	Nominal Length	CRI	Input Voltage	Wattage	Lumen Output	Efficacy
HB-LED-2-105-840-P	4000K	2 ft.	>82.0	120–277V	105W	13,550	130 lm/W
HB-LED-2-105-850-P	5000K	2 ft.	>82.0	120–277V	105W	13,650	130 lm/W


PROJECT	
TYPE	
CATALOG #	

PHOTOMETRIC SPECIFICATIONS

ISOCANDELA PLOT

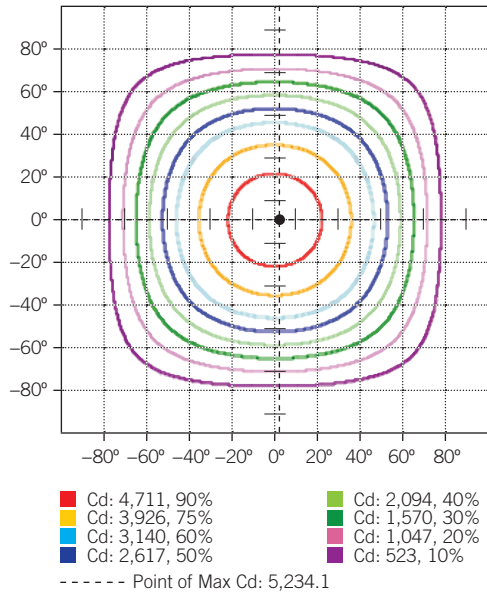


POLAR CANDELA DISTRIBUTION

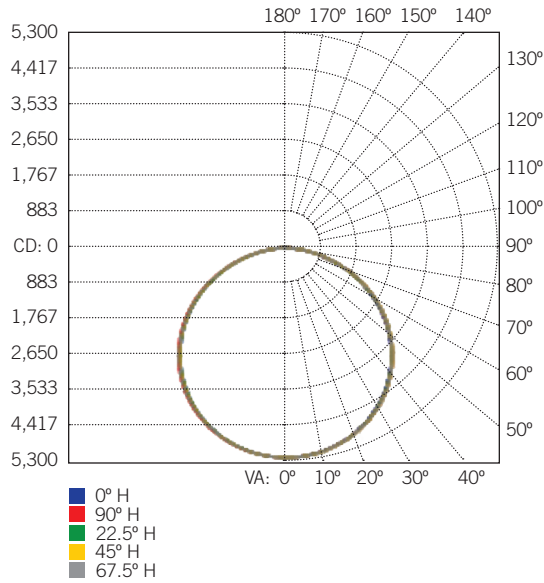

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	4,039.7	30%
0-40	6,562.3	48.7%
0-60	11,160.0	82.8%
60-90	2,321.1	17.2%
70-100	880.2	6.5%
90-120	0	0%
0-90	13,481.1	100%
90-180	0	0%
0-180	13,481.1	100%

PHYSICAL SPECIFICATIONS

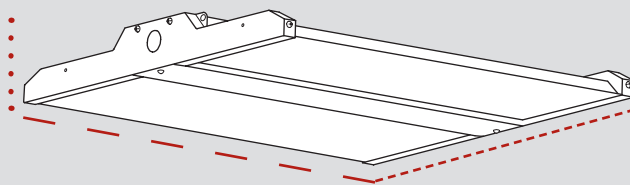

—	Length	24.4"
- - -	Width	15.0"
•••••	Height	2.4"

Weight: 5 lbs