

Project	
Type	
Catalog #	

### Overview

This cost effective right angle strip is ideal for use in all residential, commercial, and institutional areas where clearance and spacing is a problem and general lighting is desired.



### Standard



### CONSTRUCTION

This unit is designed from heavy gauge die formed steel and is finished in baked white enamel or polyester powder coating for maximum durability and reflectivity. Snap on sockets and end plates allow for tool free assembly.

### ELECTRICAL

All units are furnished with UL Listed Class P thermally protected led drivers. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location. Operates at a voltage of 120-277 (public spaces) with input voltage fluctuations of plus/minus 10 percent.

- Power Factor (PF) greater than or equal to 0.90 at full input power and across specified dimming range.
- Maximum Total Harmonic Distortion (THD) less than 20 percent at full input power and across specified dimming range.
- Operates for at least 50,000 hours at maximum case temperature and 90percent non-condensing relative humidity.
- Withstands Category A surges of 4 kV without impairment performance.
- Integral thermal protection that reduces the output power to protect the driver and light source from damage if the case temperature approaches or exceeds the driver's maximum operating temperature.
- 47 CFR 15. Complies with the requirements of the Federal Communications Commission (FCC) rules and regulations, Non-Consumer (Class A) for EMI/RFI (conducted and radiated).
- Class A sound rating.
- Restriction of Hazardous Substances (RoHS) compliant.
- **2' fixtures:** 17W/23W/32W selectable wattage available with 35k/4k/5k color options only
- **4' fixtures:** 23W/30W/40W available in 35k/4k/5k color options only

### WARRANTY & LISTINGS


- 5-year warranty of all electronics and housing.
- UL Certified for damp location
- 50,000 hours of L70 LED Life
- CRI >80 (>90 AVAILABLE UPON REQUEST)

### MOUNTING

Unit is equipped with knockouts and holes for pendant or surface mounting. This fixture can be mounted individually or in continuous run. 7/8" knock out is provided in end plate for conduit connector.

### DIMENSIONS

Max weight= 9lbs/48"

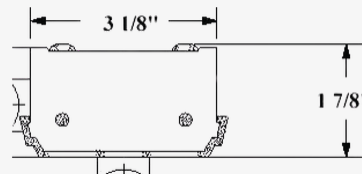

### ORDERING GUIDE

\* 0-10v low voltage dimming standard per fixture

\* Higher and custom lumen packages available upon request

\* Call Factory for lumen options of 3FT and 6FT models

\*\*Contact the factory for more information

Series	Size	Lumens	Color Temp	Options
RA-LED	2 = 2FT	<b>2FT</b>	<b>30K</b> - 3000K	<b>EMER</b> = Emergency driver <b>OCC-E</b> = External Occupancy Sensor <b>OCC-I</b> = Internal Occupancy sensor <b>BI-LEV</b> = Bi-level dimming system <b>O</b> = grounded outlet <b>TOG</b> = Toggle Switch <b>PULL</b> = Pull chain switch <b>C+P</b> = Cord & plug <b>ASY</b> = Asymmetrical Reflector <b>3WAY</b> = 3 way system <b>FR</b> = Frosted Lens over LED boards <b>NWLC</b> = Network lighting control**
	4 = 4FT	3166 (19W)	<b>35K</b> - 3500K	
6 = 6FT	4350 (27W)	4480 (27W)	<b>40K</b> - 4000K	
8 = 8FT	5470 (35W)	5705 (34W)	<b>50K</b> - 5000K	
		6452 (44W)		
		<b>4FT</b>		
		3220 (19W)		
		4480 (27W)		
		5705 (34W)		
		6910 (41W)		
		8640 (54W)		
		11797 (78W)		