

Project	
Type	
Catalog #	

### Overview

This attractive 2'x2'/2'x4' Shallow Direct/Indirect Center Basket Troffer Unit combines the energy-efficient performance with the soft, low-glare contemporary design. The RDI-C unit is designed for use with Biax provide uniform, balanced illumination, consistent distribution, and high-end appearance. Designed for use in most offices and retail establishments, this unit is as efficient as it is attractive.



### Standard



### CONSTRUCTION

Housing is die-formed from heavy-gauge steel and is finished in a matte white polyester powder coating for maximum reflectivity and durability. Perforated center basket incorporates hinges from both sides to allow for easy lamp replacement.

### ELECTRICAL

Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with the National Energy Standard. All units are UL-Certified for damp locations.

### MOUNTING


Designed for use in inverted T-Bar ceilings, this fixture comes with integral earthquake clips built into the end plate. All units are equipped with access plates for easy wiring as well as 7/8" knockouts in top, sides and end of all units.

### WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing
- UL-Certified for damp location

### DIMENSIONS

max weight= 20lbs

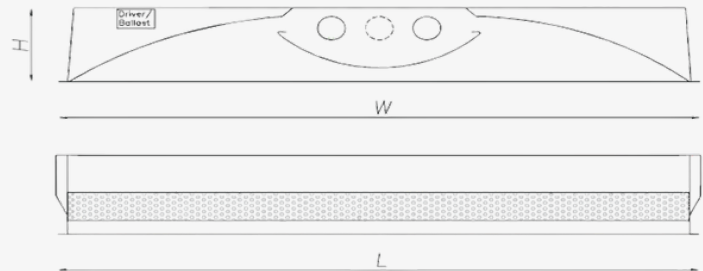

Size	H	W	L
2'x2'	3.25"	23.7"	23.7"
2'x4'	3.25"	23.7"	47.7"

### ORDERING GUIDE

\* 0-10V low-voltage dimming standard per fixture

\* Higher and custom lumen packages available upon request

Series	Size	Lumens	Color Temp	Options
RDI-SHAL LED	22 = 2X2	<b>2X4</b> 3,220 (17W) 4,480 (24W) 5,705 (30W) 6,910 (37W) 8,640 (48W) 11,797 (70W)	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	EMER = Emergency Driver FR = Frosted Lens over LED Board
	24 = 2X4	<b>2X2</b> 3,166 (17W) 4,350 (24W) 5,470 (31W) 6,452 (39W)		