


RDI-SUR LED Series

1x4/2x2/2x4 Surface Recessed
Direct-Indirect Center Basket

Project	
Type	
Catalog #	

Overview

This attractive 2'x2'/2'x4' Surface Direct/Indirect Center Basket Troffer Unit combines energy-efficient performance with the soft, low-glare contemporary design. The RDI-C unit is designed for use with Biax provide uniform, balanced illumination, consistent distribution, and high-end appearance. Designed for use in most offices and retail establishments, this unit is as efficient as it is attractive.

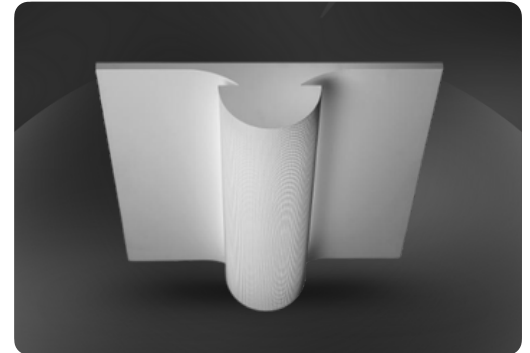

Standard



CONSTRUCTION

Housing is die-formed from heavy-gauge steel and is finished in a matte white polyester powder coating for maximum reflectivity and durability. Perforated center basket incorporates hinges from both sides to allow for easy lamp replacement.

ELECTRICAL

Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with the National Energy Standard. All units are UL-Certified for damp locations.

MOUNTING


Designed for use in inverted T-Bar ceilings, this fixture comes with integral earthquake clips built into the end plate. All units are equipped with access plates for easy wiring as well as 7/8" knockouts in top, sides and end of all units.

WARRANTY & LISTINGS


- 5-year warranty of all electronics and housing
- UL-Certified for damp location

DIMENSIONS

max weight= 20lbs

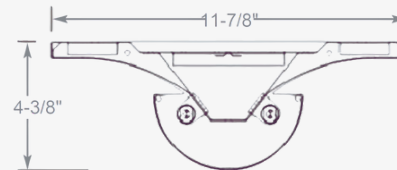

1x4-2-Lamp Perforated Basket

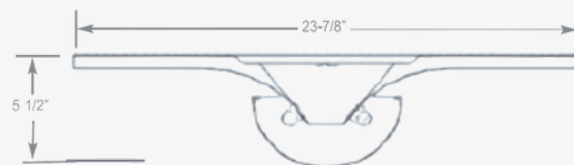

2x2/2x4-2-Lamp Perforated Basket

ORDERING GUIDE

* 0-10V low-voltage dimming standard per fixture

* Higher and custom lumen packages available upon request

Series	Size	Lumens	Color Temp	Options
RDI-SUR LED	14 = 1x4	1x4 & 2x4	3K - 3000K	EMER = Emergency Driver FR = Frosted Lens over LED Board
	22 = 2x2	3,220 (17W)	35K - 3500K	
	24 = 2x4	4,480 (24W)	4K - 4000K	
		5,705 (30W)	5K - 5000K	
		6,910 (37W)		
		8,640 (48W)		
		11,797 (70W)		
		2x2		
		3,166 (17W)		
		4,350 (24W)		
	5,470 (31W)			
	6,452 (39W)			