


Project:	
Type:	
Catalog #:	

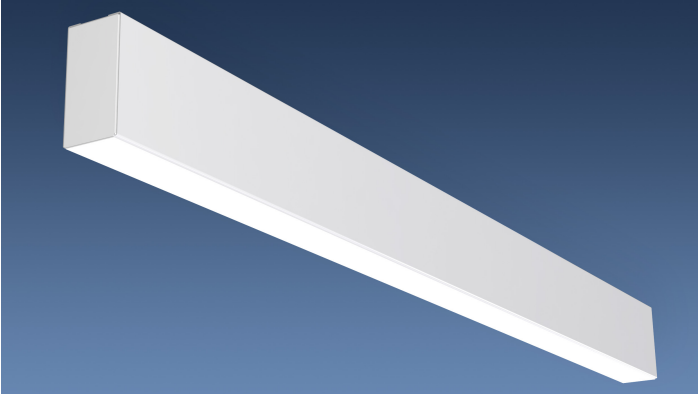

APPLICATIONS

A linear 2X5 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas, 2X5 Series fixtures can be installed individually or in a continuous run. Specifically designed for direct/indirect lighting with snap-in lens to hide the lamps or LED arrays. Ideal where downlight and uplight are required.

FEATURES & BENEFITS

- ◆ Fixtures can be pendant hung by stem or cable.
- ◆ UL listed for damp locations
- ◆ CRI 80+
- ◆ BAA Compliant



SPECIFICATIONS

Die-formed and welded 22 gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. Housing is specially designed for direct/indirect lighting with led's separating compartments for each. 4' and 8' units have a steel mullion to join two individual diffusers. Snap in lens is ideal for uplight.

ORDERING DATA

EXAMPLE: LP25-46-LED-UD-4480-4480-DMV-WH-30K



LP25 Pendant Mount! LW25 Wall Mount		Length	LED	UD Uplight/Downlight	<u>2FT</u>	Voltage	Finish	Color Temp	Options
		24 24 inch			3166-3166 (34W)	DMV	WH White	30K 3000K	EM5 5w emergency battery back up
		36 36 inch			4350-4350 (48W)	120-277V Multivolt	xx custom color	35K 3500K	
		46 46 inch			5470-5470 (62W)	0-10V Dimmable		40K 4000K	
		92 92 inch			6452-6452 (78W)			50K 5000K	EM12 12w emergency battery backup
		xx custom length				D120			
					<u>4FT</u>	Triac Dimming 120VAC			
					3220-3220(34W)				
					4480-4480 (48W)				
					5705-5705 (60W)				
					6910-6910 (74W)				
					8640-8640 (96W)!				
					11797-11797 (140W)				
					<u>8FT</u>				
					3220-3220(34W)				
					4480-4480 (48W)				
					5705-5705 (60W)				
					6910-6910 (74W)				
					8640-8640 (96W))				
					11797-11797 (140W)				
					13820-13820 (156W)				
					17280-17280 (198W)				
					22008-22008 (256W)				

***Custom shapes and continuous runs are available please call

***Custom lumen packages available please call

**SPECS SUBJECT TO CHANGE WITHOUT NOTICE

Project:	
Type:	
Catalog #:	

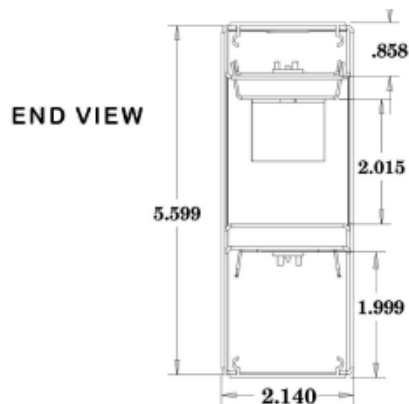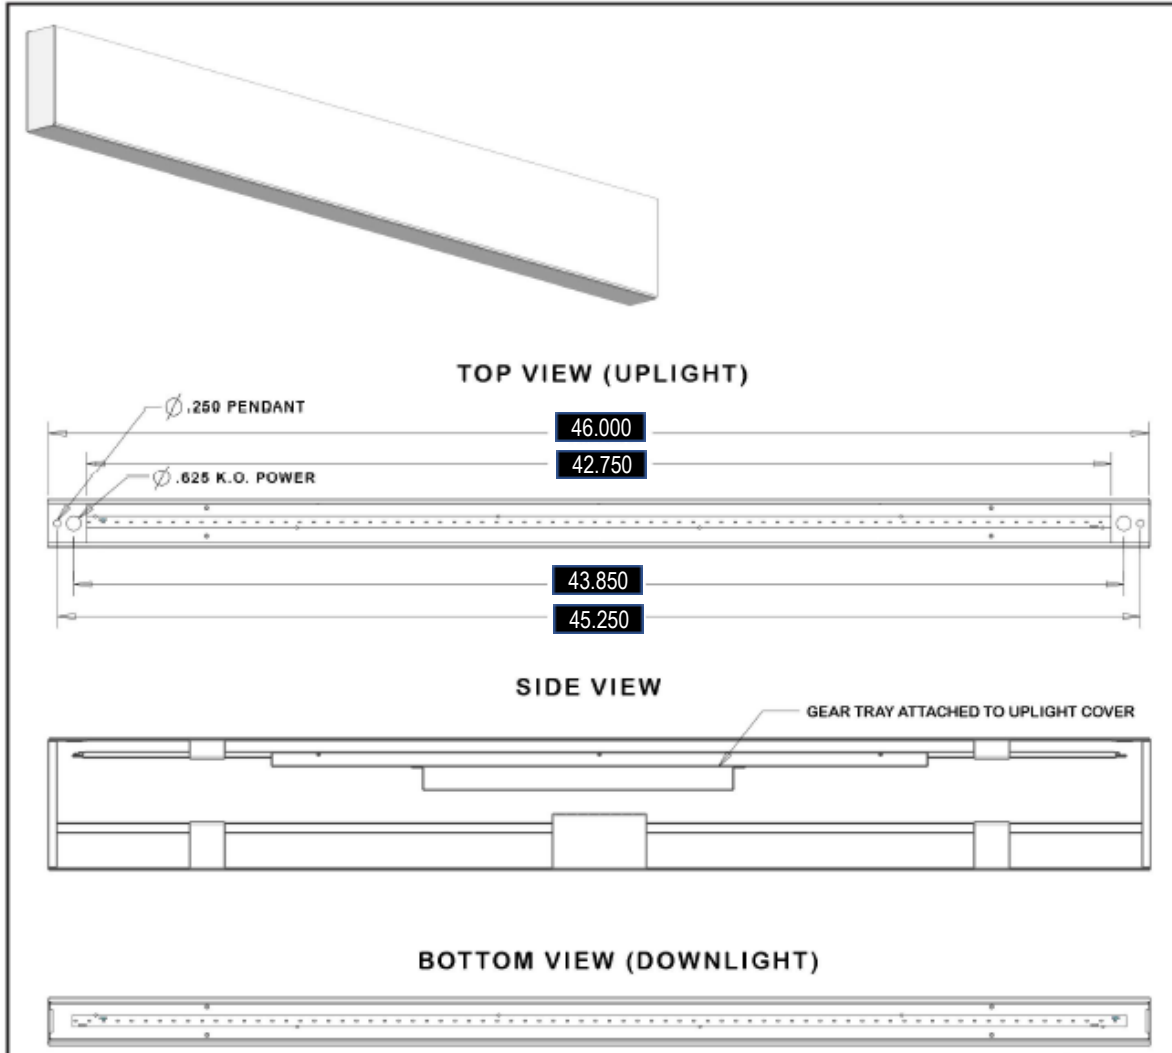

****SPECS SUBJECT TO CHANGE WITHOUT NOTICE**