

Project:	
Type:	
Catalog #:	



STANDARD



This cost effective right angle strip is ideal for use in all residential, commercial, and institutional areas where clearance and spacing is a problem and general lighting is desired.

Construction:

- This unit is designed from heavy gauge die formed steel and is finished in baked white enamel or polyester powder coating for maximum durability and reflectivity. Snap on sockets, end plates, and ballast cover allow for tool free assembly.

WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location M 59006648




Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location M 59006648

Mounting

Unit is equipped with knockouts and holes for pendant or surface mounting. This fixture can be mounted individually or in continuous run. 7/8" knock out is provided in end plate for conduit connector.

DIMENSIONS

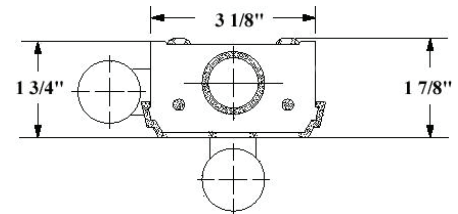

Fixture Length

T12	T8	T5	T5HO	Length
F14T12	---	---	---	15"
F15T12	---	---	---	18"
F20T12	F17T8	F14T5	F24T5HO	24"
F30T12	F25T8	F21T5	F39T5HO	36"
F40T12	F32T8	F28T5	F54T5HO	48"

For Tandem Units:
Multiply lamp length above by lamp quantity

Max Weight = 9lbs/ 48"

Ordering Guide

Series	# of Lamps	Lamp Size	Ballast Type	Options
RA	2	<p>T8</p> <p>17 = F17T8 25 = F25T8 32 = F32T8</p> <p>T5</p> <p>14 = F14T5 21 = F21T5 28 = F28T5</p> <p>T12</p> <p>15 = F15T12 20 = F20T12 30 = F30T12 40 = F40T12</p> <p>T5HO</p> <p>24 = F24T5HO 39 = F39T5HO 54 = F54T5HO</p>	<p>120 = 120V</p> <p>MV = Multivolt</p> <p>E-LW = Electronic .77 BF</p> <p>E-O = Electronic 1.18 BF</p> <p>E-DIM = Dimming Unit</p> <p>SET LED N = Wired 1 end hot for LED tubes</p> <p>SET LED N/S = Wired 2 ends hot for LED tubes</p> <p>W/LEDIF = LED ballast driven tubes</p>	<p>EMB = Embossed</p> <p>2BAL = 2 Ballast</p> <p>OCC-E = External Occupancy Sensor</p> <p>OCC-I = Internal Occupancy sensor</p> <p>BI-LEV = Bi-level dimming system</p> <p>O = grounded outlet</p> <p>TOG = Toggle Switch</p> <p>PULL = Pull chain switch</p> <p>C+P = Cord & plug</p> <p>ASY = Asymmetrical Reflector</p> <p>3WAY = 3 way system</p>