


Project:	
Type:	
Catalog #:	



ORDERING INFORMATION

Model #	# of Heads	Voltage	Wattage	Application	Color
RH16-1-6V5W	1	6 Volt	5 Watt	Indoor	White
RH16-2-6V5W	2	6 Volt	5 Watt	Indoor	White
RH16-1B-6V5W	1	6 Volt	5 Watt	Indoor	Black
RH16-2B-6V5W	2	6 Volt	5 Watt	Indoor	Black

Other voltage and wattage options available. Please contact customer service.

Model #	# of Heads	Voltage	Wattage	Application	Color
RHR-1-6V5.4W	1	6 Volt	5.4 Watt	Indoor	White
RHR-1-6V9W	1	6 Volt	9 Watt	Indoor	White
RHR-2-6V5.4W	2	6 Volt	5.4 Watt	Indoor	White
RHR-2-6V9W	2	6 Volt	9 Watt	Indoor	White
RHR-1-12V7W	1	12 Volt	7.2 Watt	Indoor	White
RHR-1-12V12W	1	12 Volt	12 Watt	Indoor	White
RHR-2-12V7W	2	12 Volt	7.2 Watt	Indoor	White
RHR-2-12V12W	2	12 Volt	12 Watt	Indoor	White
RHR-1B-6V5.4W	1	6 Volt	5.4 Watt	Indoor	Black
RHR-2B-6V5.4W	2	6 Volt	5.4 Watt	Indoor	Black

Other voltage and wattage options available. Please contact customer service.

Model #	# of Heads	Voltage	Wattage	Application	Color
RH1-6V5.4W	1	6 Volt	5.4 Watt	Indoor	White
RH1-6V9W	1	6 Volt	9 Watt	Indoor	White
RH2-6V5.4W	2	6 Volt	5.4 Watt	Indoor	White
RH2-6V9W	2	6 Volt	9 Watt	Indoor	White
RH1-12V7W	1	12 Volt	7.2 Watt	Indoor	White
RH1-12V12W	1	12 Volt	12 Watt	Indoor	White
RH2-12V7W	2	12 Volt	7.2 Watt	Indoor	White
RH2-12V12W	2	12 Volt	12 Watt	Indoor	White
RH1-WP-6V7.2W	1	6 Volt	7.2 Watt	Outdoor	Gray
RH2-WP-6V7.2W	2	6 Volt	7.2 Watt	Outdoor	Gray
RH1B-6V5.4W	1	6 Volt	5.4 Watt	Indoor	Black
RH2B-6V5.4W	2	6 Volt	5.4 Watt	Indoor	Black

Other voltage and wattage options available. Please contact customer service.

ILLUMINATION

- Smooth thermoplastic or chrome plated metalized reflector with lens for optimal light distribution.
- Available with MR-16 halogen or wedge base incandescent lamps.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base plate included with mounting hardware.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING


- Indoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Outdoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.

WARRANTY

- Five year warranty on electronics and housing.

Project:	
Type:	
Catalog #:	

RHLED2

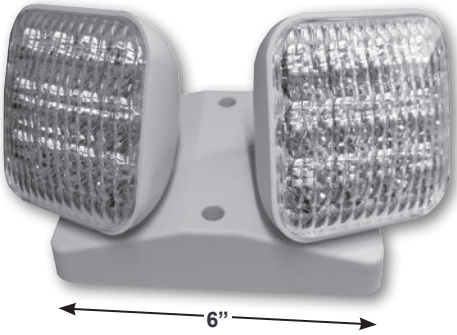

RHLED1



RHLED2-WP



RHLED1-WP



ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads.
- High-performance chrome-plated metalized reflector and plastic lens (indoor applications) or glass lens (outdoor applications) for optimal light distribution.
- Adjustable LED lamp heads increases center-to-center spacing with 8 LEDs in each lamp head.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING

- Indoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Outdoor application remote heads are die-cast aluminum, Sealed and gasketed in gray or black finish.

WARRANTY/LISTING

- Five year warranty on electronics and housing.
- UL listed with approved Best Lighting Products.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ORDERING INFORMATION

Model #	# of Heads	Voltage	Wattage	Application	Approved for
RHLED1-R1	1	3.6 Volt	1	Indoor	LED5-HO
RHLED1SDT-R1	1	3.6 Volt	1	Indoor	LED5-HO
RHLED2-R1	2	3.6 Volt	2	Indoor	LED5-HO
RHLED2-SDT-R1	2	3.6 Volt	2	Indoor	LED5-HO
RHLED1-WP-R1	1	3.6 Volt	1	Outdoor	LED5-HO
RHLED1-SDT-WP-R1	1	3.6 Volt	1	Outdoor	LED5-HO
RHLED2-WP-R1	2	3.6 Volt	2	Outdoor	LED5-HO
RHLED2-SDT-WP-R1	2	3.6 Volt	2	Outdoor	LED5-HO

Model #	# of Heads	Voltage	Wattage	Application	Approved for
RHLED1-CLPCXTE	1	9.6 Volt	1	Indoor	CLPU, LEDCXTE
RHLED1SDT-CLPCXTE	1	9.6 Volt	1	Indoor	CLPU, LEDCXTE
RHLED2-CLPCXTE	2	9.6 Volt	2	Indoor	CLPU, LEDCXTE
RHLED2-SDT-CLPCXTE	2	9.6 Volt	2	Indoor	CLPU, LEDCXTE
RHLED1-WP-CLPCXTE	1	9.6 Volt	1	Outdoor	CLPU, LEDCXTE, LEDTFX-2
RHLED1-SDT-WP-CLPCXTE	1	9.6 Volt	1	Outdoor	CLPU, LEDCXTE, LEDTFX-2
RHLED2-WP-CLPCXTE	2	9.6 Volt	2	Outdoor	CLPU, LEDCXTE, LEDTFX-2
RHLED2-SDT-WP-CLPCXTE	2	9.6 Volt	2	Outdoor	CLPU, LEDCXTE, LEDTFX-2