

S-LED-2-19-8XX-P

2' LED STRIP FIXTURE

PROJECT	
TYPE	
CATALOG #	



19W, 120-277V Input, 0-10V Dimming

PRODUCT FEATURES

- Powered by 0-10V dimming LED drivers
- Smooth diffused lens for an even appearance
- 0-10V dimming, 10% minimum
- Compatible with emergency LED drivers
- Compatible with 480-277V step down transformers
- Compatible with occupancy sensors
- Ambient operating temperature: -20°C/-4°F to 50°C/122°F
- UL Listed 1598: Suitable for dry and damp locations
- THD: <20%
- Power factor > 0.95
- L70 >50,000 hours



AVAILABLE MODIFICATIONS (WITH VOLUME ORDER)


- Lumen targets
- Frame colors

PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temp	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
S-LED-2-19-835-P	3500K	2'	120-277V	19W	>82	2470	130 lm/W
S-LED-2-19-840-P	4000K	2'	120-277V	19W	>82	2489	131 lm/W
S-LED-2-19-850-P	5000K	2'	120-277V	19W	>82	2508	132 lm/W

PROJECT	
TYPE	
CATALOG #	


PHOTOMETRIC SPECIFICATIONS

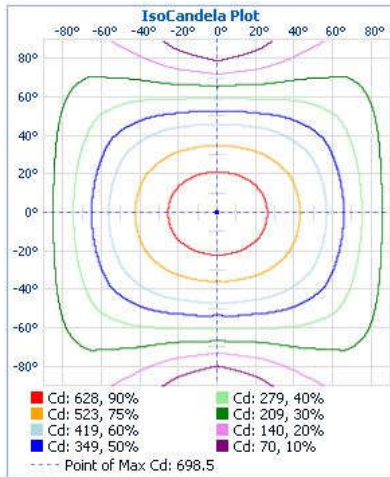

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	539.7	22.1%
0-40	884.5	36.2%
0-60	1,588.7	65%
60-90	652.5	26.7%
70-100	459.8	18.8%
90-120	175.4	7.2%
0-90	2,241.2	91.7%
90-180	203.4	8.3%
0-180	2,444.6	100%

PHYSICAL SPECIFICATIONS

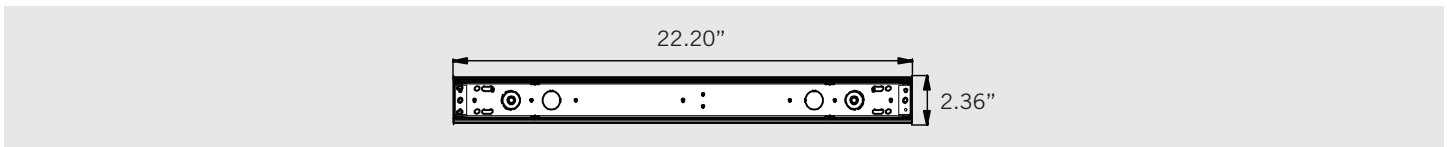

ORDERING INFORMATION

Catalog Number	Packaging Style	Quantity	Item Status
S-LED-2-19-835-P	Carton Pack	1	Active
S-LED-2-19-840-P	Carton Pack	1	Active
S-LED-2-19-850-P	Carton Pack	1	Active