


| | |
|-------------------|--|
| Project: | |
| Type: | |
| Catalog #: | |



STANDARD

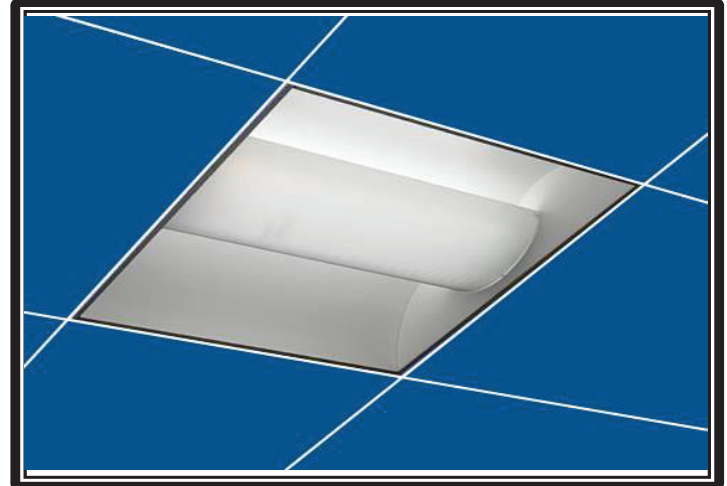

This attractive 2'x2'/ 2' x4' Shallow Direct/Indirect Center Basket Troffer Unit combines the energy efficient performances of electronic ballast with soft low-glare contemporary design. The RDI-C unit is designed for use with Biax, T5, and T8 lamps to provide uniform balanced illumination, consistent distribution and high end appearance. Designed for use in most offices and retail establishments this unit is as efficient as it is attractive

Construction:

- Housing is die formed from heavy gauge steel and is finished in a matte white polyester powder coating for maximum reflectivity and durability. Perforated center basket incorporates hinges from both sides to allow for easy lamp replacement.

Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location


Mounting

Designed for use in inverted T Bar ceilings, this fixture comes with integral earthquake clips built into end plate. All units are equipped access plates for easy wiring as well as 7/8" knockouts in top, sides and end of all units.

WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location

DIMENSIONS

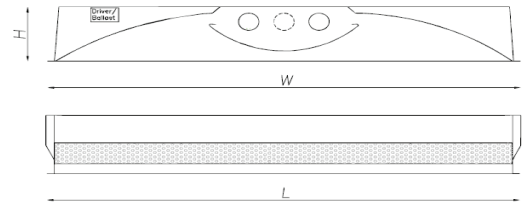

| Size | Lamps | H | W | L |
|-------|------------------|-------|-------|-------|
| 2'x2' | 1/2/3 x T5/TT/T8 | 3.25" | 23.7" | 23.7" |
| 2'x4' | 1/2/3 x T5/T8 | 3.25" | 23.7" | 47.7" |

Ordering Guide

max weight= 20lbs

RDI-SHAL LED

Series
RDI-SHAL LED

Size
22 = 2X2
24 = 2X4

Lumens
2X4
3220 (17W)
4480 (24W)
5705 (30W)
6910 (37W)
8640 (48W)
11797 (70W)

Color
3K
35K
4K
5K

Options
EMB = Emergency Ballast
FR = Frosted Lens over LED Board

*0-10v low voltage dimming standard per fixture

*Higher and custom lumen packages available upon request

2X2
3166 (17W)
4350 (24W)
5470 (31W)
6452 (39W)