


Project:	
Type:	
Catalog #:	



### STANDARD

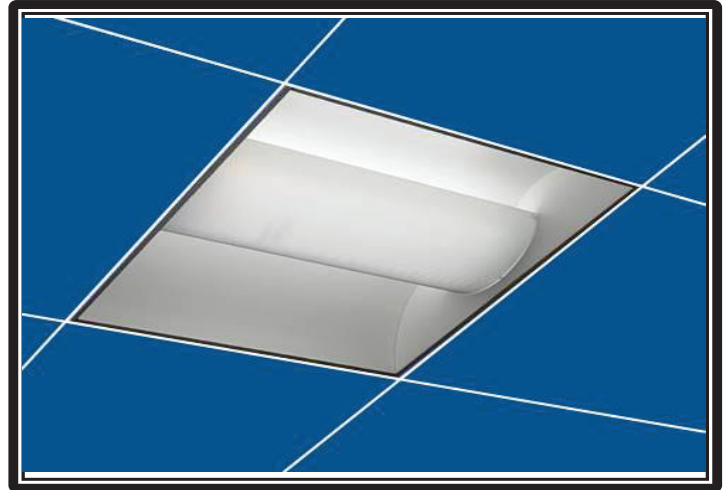

This attractive 2'x2'/ 2' x4' Shallow Direct/Indirect Center Basket Troffer Unit combines the energy efficient performances of electronic ballast with soft low-glare contemporary design. The RDI-C unit is designed for use with Biax, T5, and T8 lamps to provide uniform balanced illumination, consistent distribution and high end appearance. Designed for use in most offices and retail establishments this unit is as efficient as it is attractive

### Construction:

Construction details and materials are listed here.

### Electrical

All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location M 59006648


### Mounting

Designed for use in inverted T Bar ceilings, this fixture comes with integral earthquake clips built into end plate. All units are equipped access plates for easy wiring as well as 7/8" knockouts in top, sides and end of all units.

### WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for damp location M 59006648

### DIMENSIONS

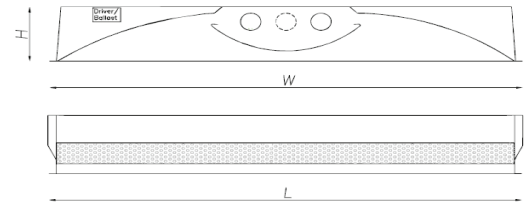

Size	Lamps	H	W	L
2'x2'	1/2/3 x T5/TT/T8	3.25"	23.7"	23.7"
2'x4'	1/2/3 x T5/T8	3.25"	23.7"	47.7"

### Ordering Guide

#### 2X4 RDI-SHAL

Series	# of Lamps	Lamp Size	Ballast Type	Options												
2X4 RDI-SHAL 2x2 RDI-SHAL	1 = 1 Lamp 2 = 2 lamp 3 = 3 lamp	<table border="0"> <tr> <td>T8</td> <td>T5</td> </tr> <tr> <td>17= 24"</td> <td>14= 24"</td> </tr> <tr> <td>32= 48"</td> <td>28= 48"</td> </tr> <tr> <td colspan="2" style="text-align:center">T5HO</td> </tr> <tr> <td colspan="2" style="text-align:center">24= 24"</td> </tr> <tr> <td colspan="2" style="text-align:center">54= 48"</td> </tr> </table> Biax/ Twin Tube 36BX = 36W Biax 40BX = 40w Biax 50BX= 50w Biax 55BX= 55w Biax	T8	T5	17= 24"	14= 24"	32= 48"	28= 48"	T5HO		24= 24"		54= 48"		MV = Multivol E-LW = Electronic .77 BF E-O = Electronic 1.18 BF E-DIM = Dimming Unit	EMB = Emergency Ballast 2BAL = 2 BALLAST
T8	T5															
17= 24"	14= 24"															
32= 48"	28= 48"															
T5HO																
24= 24"																
54= 48"																
			SET LED N = Wired 1 end hot for LED tubes SET LED N/S = Wired 2 ends hot for LED tubes W/LEDIF = LED ballast driven tubes													