


Project:	
Type:	
Catalog #:	

Commercial Downlight

4", 6", 8"

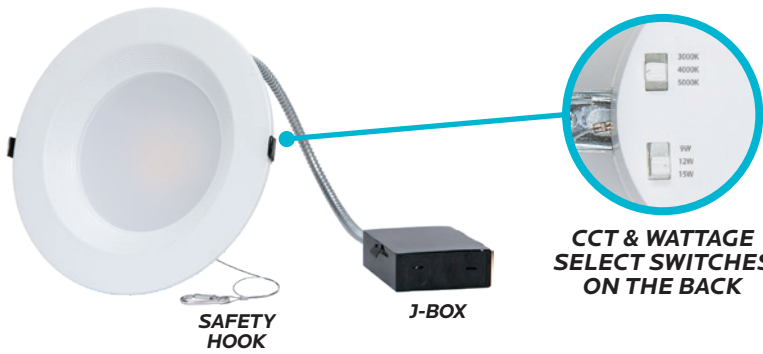

- 3 Year Warranty
- CRI 80
- 120-277V
- CCT SELECT: SOFT 3000K, COOL 4000K, BRIGHT 5000K
- IC RATED
- WATTAGE SELECT
- COMMERCIAL DOWNLIGHT SHAPE
- WETLOCATION RATED
- DIMMABLE 0-10V

Project:	
Type:	
Catalog #:	

Commercial Downlight

4", 6", 8"

SPECIFICATIONS

ELECTRICAL







MODEL	DESCRIPTION	POWER	LUMEN	EFFICACY	INPUT VOLTS	DIMMABLE	FREQUENCY	LIFETIME	POWER FACTOR
23948	LED/CDL4HO/3WO/3CCT/B/JB	9W	810	90	120-277V	0-10V	50/60Hz	50,000	>0.9
		12W	1080						
		15W	1350						
23951	LED/CDL6HO/3WO/3CCT/B/JB	12W	1140	90	120-277V	0-10V	50/60Hz	50,000	>0.9
		16W	1520						
		20W	1900						
23959	LED/CDL8HO/3WO/3CCT/B/JB	16W	1600	90	120-277V	0-10V	50/60Hz	50,000	>0.9
		21W	2100						
		27W	2700						

PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	FLOOD	CRI	IC RATED	WET LOCATION	UL LISTED	ENERGY STAR
23948	3000K/4000K/5000K	SOFT/COOL/BRIGHT	120°	80	YES	YES	YES	YES
23951	3000K/4000K/5000K	SOFT/COOL/BRIGHT	120°	80	YES	YES	YES	YES
23959	3000K/4000K/5000K	SOFT/COOL/BRIGHT	120°	80	YES	YES	YES	YES

GENERAL

DIMENSIONS

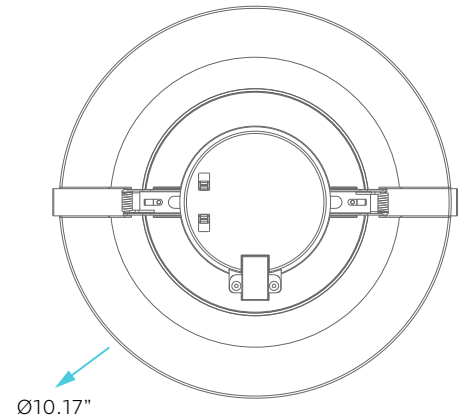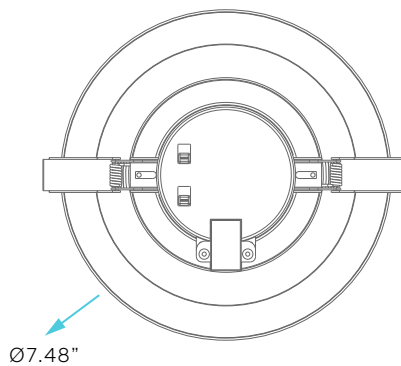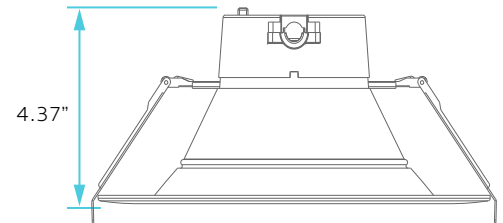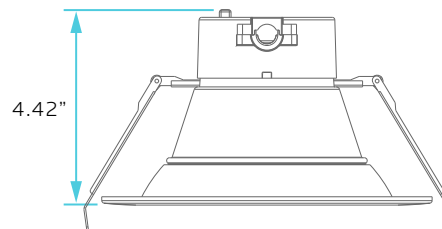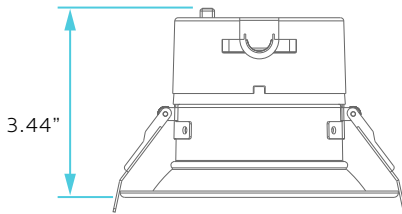

4"

6"

8"



Cutout: Ø 4.30"



Cutout: Ø 6.30"



Cutout: Ø 7.87"