


6" LED EDGE LIT UNIVERSAL EXIT COMBO (G)

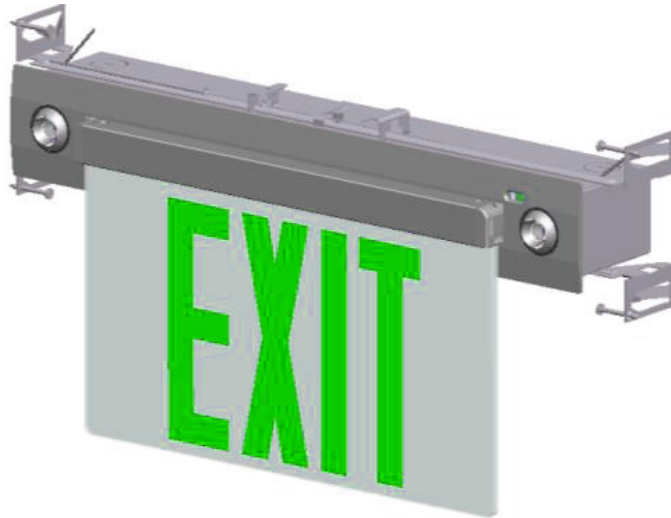

Watt	1.5W per head
Rated Life	50,000 Hours
Input Voltage	120/277V
Input Frequency	60Hz
Dimensions	W: 1/4" L: 17.25" H: 10"
Operating Temperatures	10 - 40 C
Environment	Damp Location
Certification	UL
Warranty	2 Years

Features & Options

Housing: Compact and architectural design • Low profile • Aluminum housing • Replaceable EXIT panel • Removable directional indicators • Single (clear) and double (mirror) face universal design • Removable front cover for easy installation and maintenance • 6" height green letter

Mounting: Easy installation in any application, including surface and recessed, ceiling or wall

Electrical: Test switch and charge rate indicator • Self testing and self diagnostics option • Fully automatic, solid state charger • 90 minute emergency run time • 24 hour recharge time • Short Circuit protection

Listing: Meets requirements in UL 924

