

Project	
Type	
Catalog #	

### Overview

This billboard unit provides high light levels with even distribution, for spot lighting. The unit is weather resistant and suitable for most outdoor applications.



### Standard



### CONSTRUCTION

- Powder-coated white aluminum housing with cast-aluminum end plates and a clear acrylic diffuser.

### ELECTRICAL

- Fixtures meet requirements for UL Luminaire Standard # 1598.
- All units comply with National Energy Standard.
- All units are UL certified damp and wet location


### MOUNTING

- Units are designed to be conduit mounted either individually, tandem, or in a continuous run

### WARRANTY & LISTINGS

- 5-year warranty of all electronics and housing.
- UL Certified for wet location
- DLC 5.1

### DIMENSIONS

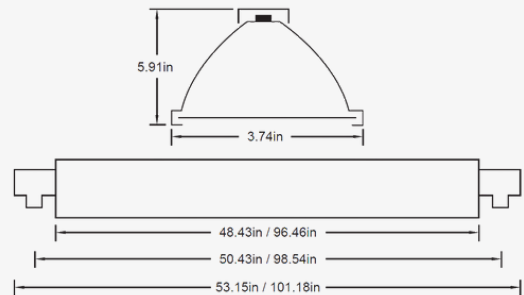

### ORDERING GUIDE

SKU	OD-LED-4FT-60SW-SCT3				OD-LED-8FT-120SW-SCT3	
System Wattage	38W-48W-60W Field Adjustable				76W-96W-120W Field Adjustable	
Efficacy	Up to 156 LPW @ High Wattage					
Lumens	8350 lm	9350 lm	8850 lm	16700 lm	18700 lm	17700 lm
	139 LPW	156 LPW	148 LPW	139 LPW	156 LPW	148 LPW
	@3000K, 60W	@4000K, 60W	@5000K, 60W	@3000K, 120W	@4000K, 120W	@5000K, 120W
Input Voltage	120-277V / 120-347V					
CCT	3000K-4000K-5000K Field Adjustable					
CRI	>80					
Ambient Temperature	-30°C-40°C (-22°F-104°F)					
LED Performance	L70>50000H					
Warranty	5-year warranty (for downlight only)					