SLFL-LED SERIES

Slim Line LED Flood

Aplication: Architectural bronze LED Area Light is designed for a more cost effective solution for illuminating loading docks, parking areas, pathways, doorways and a wide range of other general large site lighting.

Housing: Die cast aluminum housing with durable dark bronze powder coat finish. Polycarbonate light cover

Electrical: Universal 120-277VAC, 50,000 hour rated lamp life, CRI>80, 120 Lumens/ watt

Mounting: 15w,30w,50w standard knuckle with ½" NPS stem with locking nut. 80w,100w,150w,300w standard slip fitter

Warranty: cULus listed for wet location (-30C – 40C), DLC Approved, IP65 Rated, Tested UL1598, UL8750, IEC60598, 5 year warranty

Model	Wattage	No. Of LEDS	Lumens	Lumen/ Watt	Dimensions
SLFL-LED-15	15.2W	18	1450	95.39 L/W	4⅜ x 3¼ x 1½
SLFL-LED-30	29.5W	36	2899	98.27 L/W	6⅞ x 5⅛ x 1⅝
SLFL-LED-50	50W	60	4900	98.00 L/W	8½ x 6 x 1¾
SLFL-LED-80	80W	120	8450	105.62 L/W	12⅝ x 9⅞ x 3⅜
SLFL-LED-100	100W	120	10,000	100 L/E	12 ¾ X 9 7/8 X 3 ½
SLFL-LED-150	150W	160	15,130	100.87 L/W	12⅝ x 9⅞ x 3½
SLFL-LED-300	300W	320	30,850	102.83 L/W	16⅞ x 12⅝ x 3⅝

DIMENSIONS

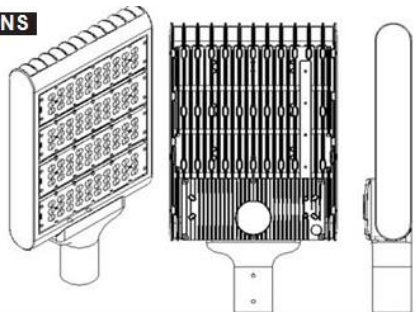

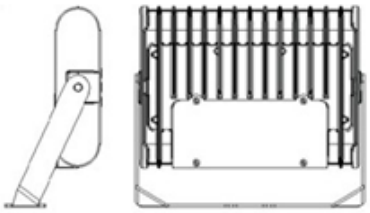

K-B Lighting Mfg. Co., Inc
2515 Metropolitan Drive Trevose Pa 19053
P: (215)953-6663 F: (215)953-6710 E: benkblight@gmail.com
KBLIGHTING.COM